




Stepper Motor Linear Actuators

Pre-Engineered Motorized Lead Screw Assemblies
for Precision Applications

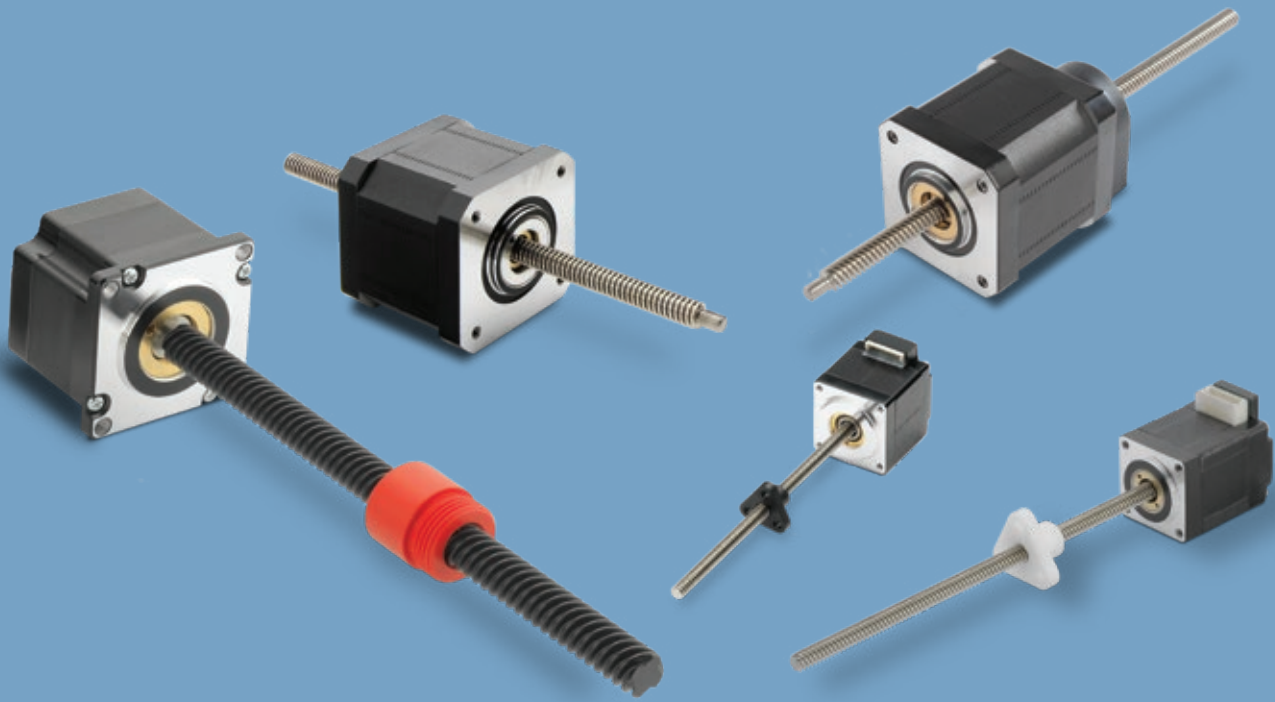

Stepper Motor Linear Actuator Assemblies

Combining cutting-edge motor, lead screw and encoder technologies


Thomson offers two basic configurations – rotating screw (MLS) and rotating nut (MLN). These open architecture motorized lead screws suit applications where external guidance is present or a high level of design flexibility is required.

Technology Overview

Rotating screw assemblies (MLS) actuate by having the motor rotate a lead screw and translate a load that is attached to the lead nut. Rotating nut assemblies (MLN) actuate by rotating a nut within the motor body. Motion is achieved by constraining the motor and translating a load attached to the lead screw or constraining the lead screw and translating a load attached to the motor.


Rotating Screw Configuration MLS

The rotating screw design, which is ideal for rapid prototyping, features our patented Taper-Lock design to connect the lead screw to the motor shaft. It is best suited for applications where a high level of modularity or customization is required. Users have the freedom to configure an assembly from a range of lead screw, lead nut and motor options as needed for their applications.

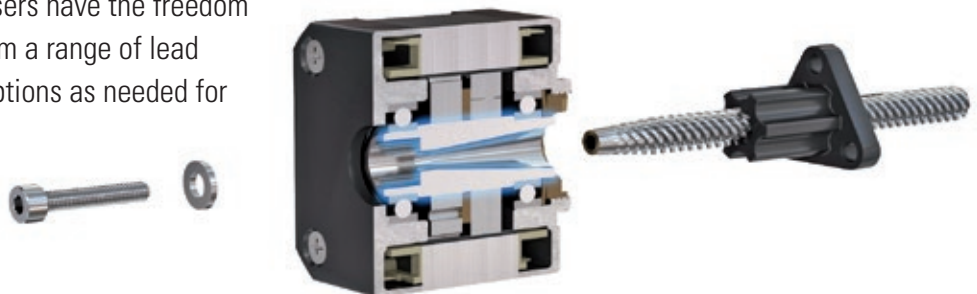

Rotating Nut Configuration MLN

The rotating nut design features our patented integration of a lead nut into the motor rotor to maximize screw diameter, which increases load capacity. It is ideally suited for applications where no visible rotation is desired or where it is necessary to translate a load on either side of the motor.

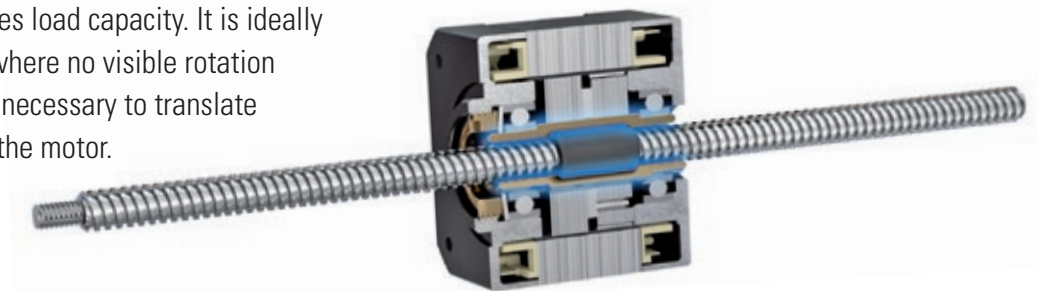

Motorized Lead Screws

Thomson motorized lead screws combine a hybrid stepper motor and a precision lead screw together in one compact envelope. Patented Taper-Lock technology allows quick decoupling and secure, properly aligned connections. This combination offers several advantages over a traditional solution.

Improved Efficiency

Thomson provides a more efficient motorized solution to reduce power consumption, improve operating battery life, and decrease motor footprint. With this improved efficiency, an increase in system load performance or a reduction in power consumption can be expected – all while having a lower cost of ownership.

Increased Torque Density


Thomson motorized lead screws offer increased torque density over alternative solutions. By optimizing the motor performance and matching this with the ideal lead screw and nut design, Thomson has been able to increase the load capacity by up to 30% while maintaining the same motor footprint.

The Taper-Lock Advantage

The robust design of the Taper-Lock provides a secure, self-aligning connection between the lead screw and stepper motor.

Reduced Noise


Thomson can optimize your motor configuration and windings to limit motor harmonics and reduce motor noise at your application operating points.

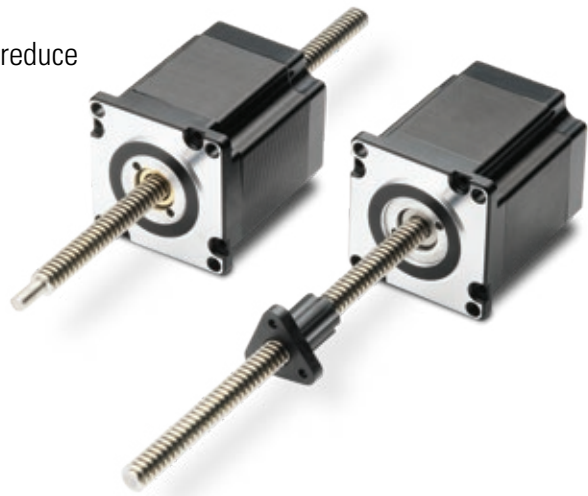

Thomson Advantage

The Thomson Taper-Lock

Fixing the motor to the lead screw usually requires a coupling assembly (A), a counter-bore press fit (B) or a hollow shaft press fit (C). The assembly process may also entail the use of adhesives or welding, but the bottom line is that all these solutions make it difficult or impossible to change lead screws or perform maintenance. Thomson has solved this issue with our patented Taper-Lock coupling (D) that requires only a single retention fastener.

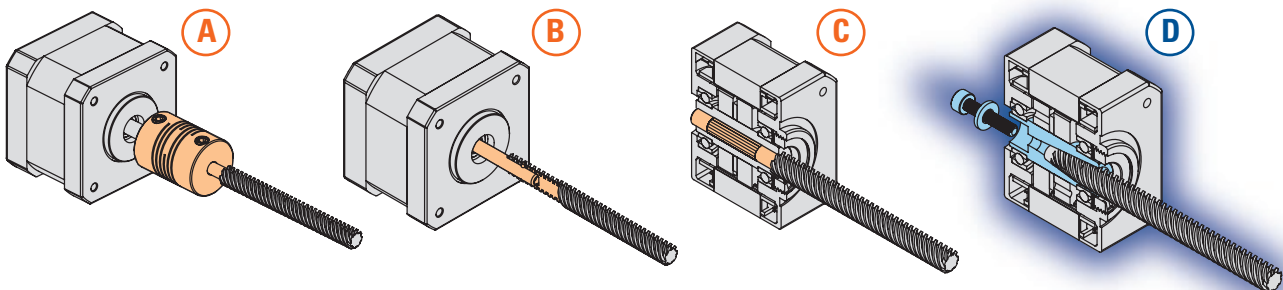

Coupling assembly

- space demanding
- requires more external components
- reduced stroke
- may reduce accuracy

Counter-bore press fit

- poor lead screw alignment
- lead screw prone to slipping and decoupling
- reduced stroke
- difficult to service lead screw

Hollow shaft press fit

- fewer compatible lead screws
- poor lead screw alignment
- lead screw prone to slipping and decoupling
- difficult to service lead screw

Thomson Taper-Lock

- increased lead screw configurability
- precise lead screw alignment
- increased stroke length
- compact form factor


Thrust Force Comparison

Thomson optimized motors will result in up to a 30% increase in thrust over the competition. That means you will get a smaller and more efficient solution with the same power output.


Temperature Rise Comparison

Thomson offers more efficient motors where more torque can be output with less heat loss – meaning that our motors can be operated with higher power input while maintaining lower heat generation.

Load vs. Speed

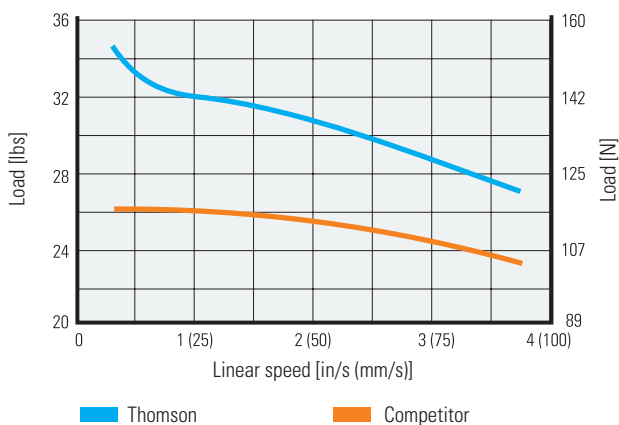

Temperature vs. Operation Time

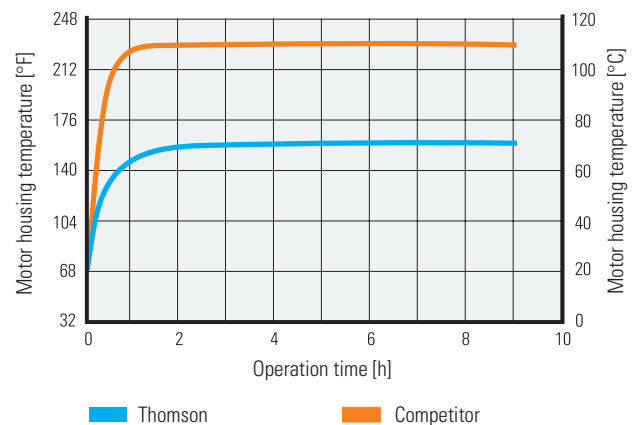

The curves were generated with a 1.5 A / 2.33 V, 1.8° NEMA 17 single stack, rotating screw stepper motor. Test ran with a 0.9°, 24 VDC chopper drive and a 4-2516 lead screw at an ambient temperature of 20 °C.

Ordering Keys

MLS/MLN Ordering Key

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
MLS	17	A	15	– 25	0250	P	06000	N	– B2	00	RS	2	– XX	–

1. Series
MLS = Rotating screw
MLN = Rotating nut

2. Motor size¹
X8 = NEMA 08 (MLS only)
11 = NEMA 11
14 = NEMA 14
17 = NEMA 17
23 = NEMA 23

3. Motor stack¹
A = Single
B = Double
X = Custom single²
Y = Custom double²

4. Motor current rating (in 0.1 amps)¹
05 = 0.5 amps
10 = 1.0 amps
13 = 1.3 amps
15 = 1.5 amps
19 = 1.9 amps
30 = 3.0 amps

5. Screw diameter³
18 = 0.188 in M04 = 4.0 mm
25 = 0.250 in M06 = 6.0 mm
31 = 0.313 in M08 = 8.0 mm
37 = 0.375 in M10 = 10.0 mm
43 = 0.438 in M12 = 12.0 mm
50 = 0.500 in

6. Linear travel/rev³
0031 = 0.031 in 0750 = 0.750 in
0040 = 0.040 in 0800 = 0.800 in
0050 = 0.050 in 1000 = 1.000 in
0063 = 0.063 in 1200 = 1.200 in
0079 = 0.079 in 1500 = 1.500 in
0083 = 0.083 in 010 = 1.0 mm
0100 = 0.100 in 020 = 2.0 mm
0118 = 0.118 in 030 = 3.0 mm
0125 = 0.125 in 040 = 4.0 mm
0157 = 0.157 in 050 = 5.0 mm
0167 = 0.167 in 060 = 6.0 mm
0192 = 0.192 in 080 = 8.0 mm
0200 = 0.200 in 100 = 10.0 mm
0250 = 0.250 in 120 = 12.0 mm
0300 = 0.300 in 150 = 15.0 mm
0333 = 0.333 in 160 = 16.0 mm
0375 = 0.375 in 180 = 18.0 mm
0400 = 0.400 in 200 = 20.0 mm
0500 = 0.500 in 250 = 25.0 mm

7. Accuracy grade
S = Standard 0.010 in/ft (250 µm/300 mm)
P = Precision 0.003 in/ft (75 µm/300 mm)

8. Lead screw overall length^{1,2}
0X000 = X.000 in (ex: 06000 = 6.000 in)
XXX00 = XXX.00 mm (when metric diameter is selected, ex: 15000 = 150.00 mm)

9. Lead screw coating
N = No coating on lead screw
T = PTFE-coated lead screw⁴

10. Front-end machining⁵
A0 = No machining

Plain journal ends:
B1 = Ø 2.50 mm h7
B2 = Ø 4.00 mm h7
B3 = Ø 5.00 mm h7
B4 = Ø 6.00 mm h7
BX = Custom journal end machining²

Male threaded ends:
C1 = #4-40 x 0.250 in
C2 = #8-32 x 0.250 in
C3 = #10-24 x 0.375 in
C4 = 1/4-20 x 0.500 in
C5 = M2.5x0.45 x 6.35 mm
C6 = M4x0.7 x 6.35 mm
C7 = M5x0.8 x 9.53 mm
C8 = M6x1.0 x 12.70 mm
CX = Custom threaded end¹

Journal with snap ring groove:
D1 = Ø 2.50 mm and ring groove
D2 = Ø 4.00 mm and ring groove
D3 = Ø 5.00 mm and ring groove
D4 = Ø 6.00 mm and ring groove
DX = Custom journal with snap ring groove¹

11. Rear-end machining⁵
MLN same options as front-end
MLS is always 00
XX = Other custom end machining²

12. Nut. MLN is always XX⁶
XX = No nut or MLN
RS = Flange mount, acetal material (RSF Series nuts)
AF = Flange mount, alternative anti-backlash (AFT Series nuts)
BN = Threaded mount, bronze material (BN Series nuts)
MT = Flange mount, alternative to RS nut (MTS Series nuts)
RH = Flange mount, peek material (RSFH Series nuts)
SB = Thread mount, alternative anti-backlash (SNAB Series nuts)
SN = Threaded mount, acetal material (SN Series nuts)
XF = Triangular flange, anti-backlash (XC Series nuts)
XT = Threaded mount, anti-backlash (XC Series nuts)

13. Nut size. MLN is always X⁶
X = No nut or MLN
1 = 0.188 in and 4 mm dia screws⁷
2 = 0.250 in and 6 mm dia screws^{8,9}
3 = 0.313 in, 0.375 in, 8 and 10 mm screws
5 = 0.438 in, 0.50 in and 12 mm screws

14. Standard encoder designation¹⁰
(blank) = No standard encoder
XX = Standard encoder configuration
To be assigned by Thomson

15. Custom designation²
(blank) = Standard configuration
001-999 = Custom configuration
To be assigned by Thomson


- For available standard motors, see pages 14-28.
- To be assigned by Thomson only.
- For compatible lead screws, see pages 10-11.
- PTFE coating not available for MLN configurations or with RH (RSFH) lead nuts.
- For compatible end-machining options, see page 13.
- RS nut standard on MLS. For optional nut compatibility, see pages 32-33.
- XF1 and XT1 nut also compatible for 0.250 in and 6 mm diameter lead screws
- SN2 nut used for 0.188 in diameter lead screws and SB2 nut used for 0.188 in and 4 mm diameter lead screws
- MT2 nut used for 0.188 in, 4 mm, 0.250 in, 6 mm, 0.313 in, and 8 mm diameter lead screws
- For encoder designation table, visit:
https://www.thomsonlinear.com/downloads/actuators/SMLA_encoder_codes_.pdf

Please visit [thomsonlinear.com/smla](https://www.thomsonlinear.com/smla) to access our stepper motor linear actuator selector and part number generator.

Application Examples

These common applications show that stepper motor linear actuators reduce the total number of components in your design, while minimizing space requirements, and making assembly and maintenance quicker and easier. Examples are shown for both configurations - rotating screw (MLS) and rotating nut (MLN).

Fluid Pumps

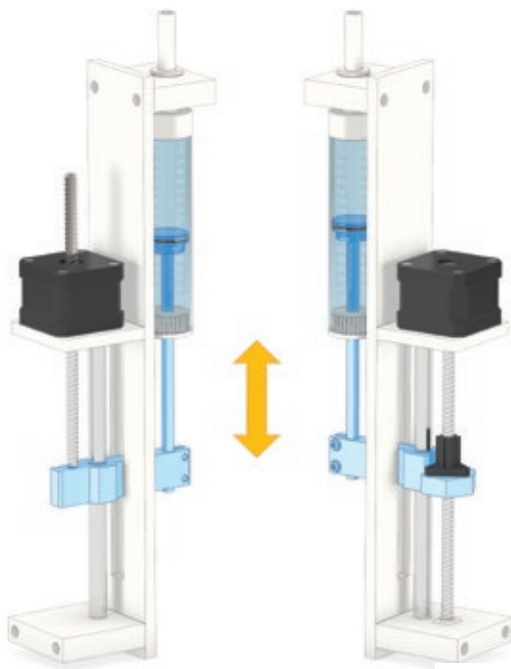
MLN**MLS**


Regardless of the mounting configuration, a stepper motor linear actuator can increase pump pressure, reduce equipment footprint and more accurately dispense fluid.

XY Stages

MLS

Stepper motor linear actuators optimize XY stage designs with their compactness and power.


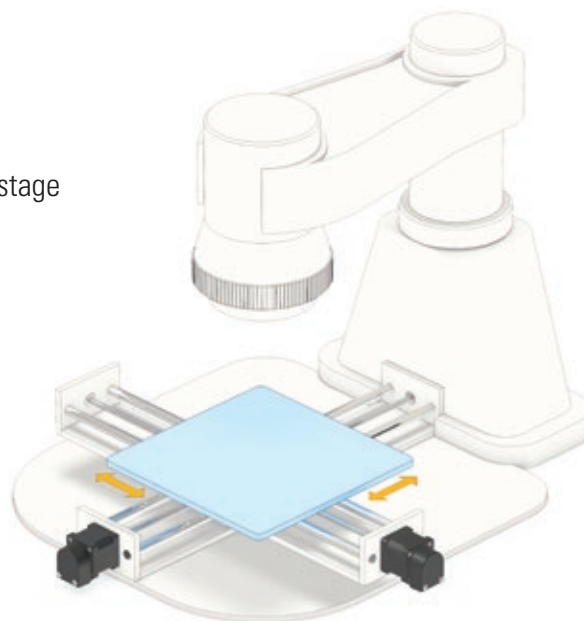


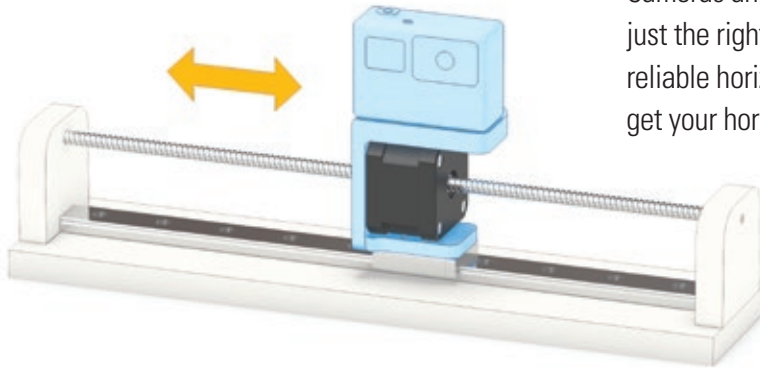Horizontal Positioning**MLN**

Cameras and other measurement devices need to be in just the right place at just the right time. MLN delivers reliable horizontal positioning and length selections to get your horizontal positioning job done right.

3D Printing**MLS**

Utilizing a stepper motor linear actuator on a 3D printer can eliminate the need for couplings, bearings and supports while increasing stroke length and print volume.

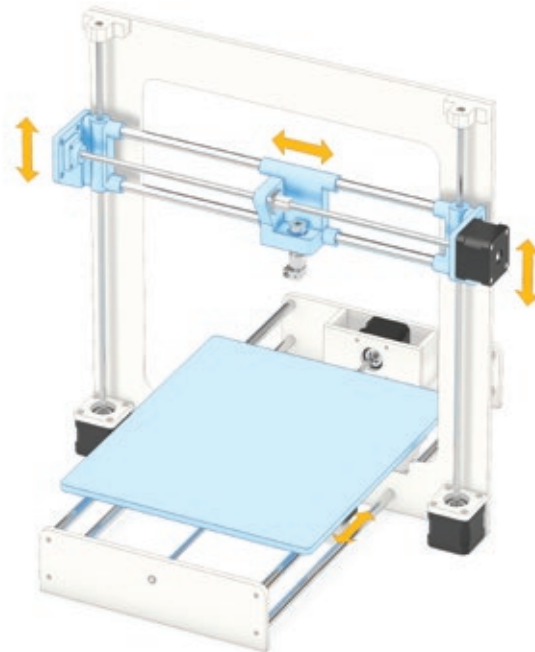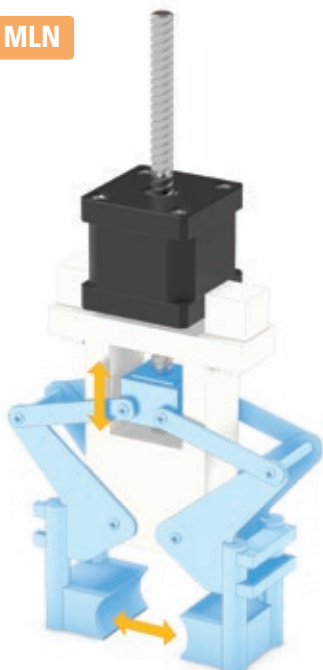**Robotic Gripper****MLN**

MLN configurations excel in gripping applications, rotating and positioning gripper heads and attachments with ease.



Sizing and Selection Guidelines


How to Select Motor and Lead Screw

For a basic sizing determination, use the motor performance charts throughout the brochure to select the appropriate lead screw based on your load and speed requirements.

Example:

Required Force = 20 lbf (89 N)

Required Speed = 1 in/s (25 mm/s)

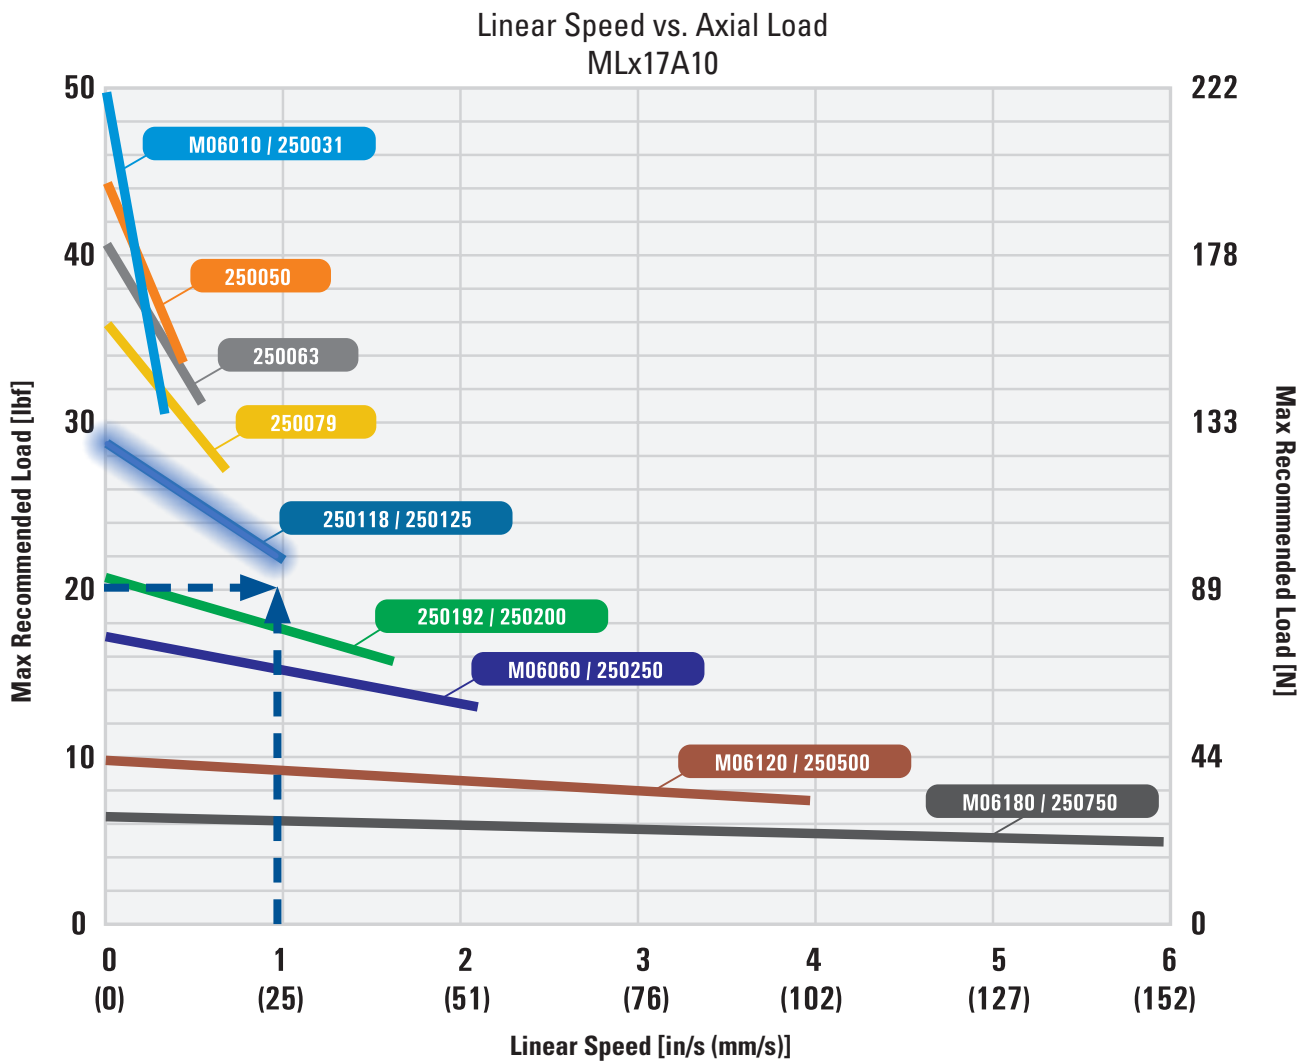



Given the force and speed requirements of 20 lbf and 1 in/s, respectively, the ideal screw is a 250118 or 250125 with this motor.

Note: Simplified performance diagrams are theoretical only and assume ideal conditions with a 24 VDC power supply, standard material lead nut and a moderate length, non-lubricated lead screw. Higher loads and speeds can be achieved. For more detailed performance plots and sizing tools, please visit www.thomsonlinear.com/en/products/motorized-lead-screws.


Sizing and Selection Guidelines

How to Determine Maximum Permissible Screw Length

For MLS and MLN configurations, in order to determine the maximum possible lead screw length for your stepper motor linear actuator assembly, the following charts can be used. These charts take in to consideration the maximum rotational speed and compression load as well as the end fixity of your system.

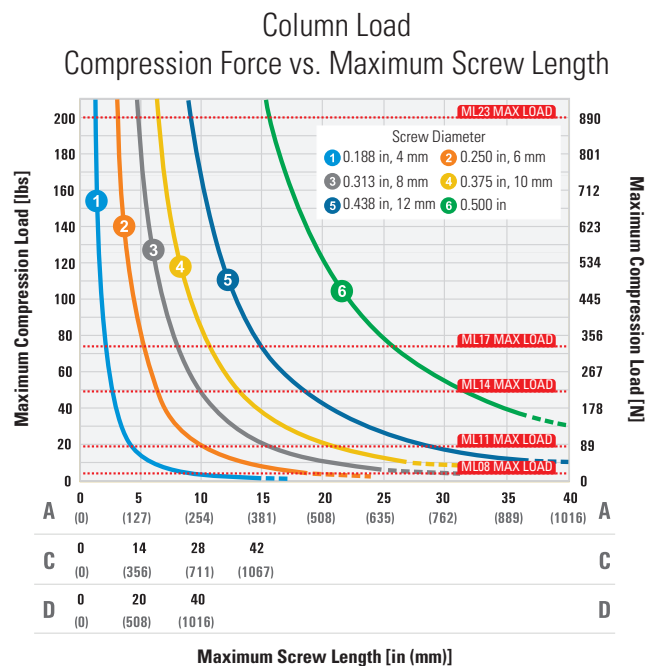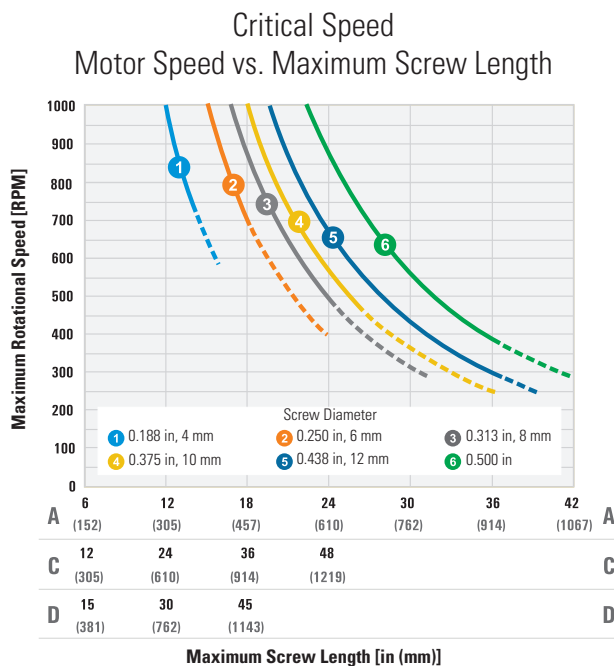

Types of Screw End Fixity

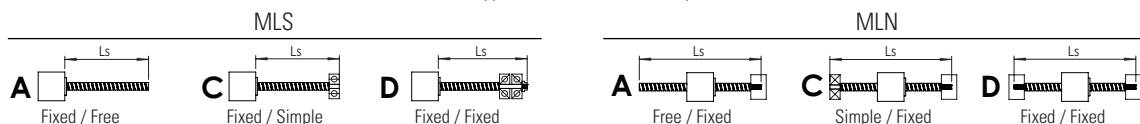

1. Determine Maximum Motor Speed

Calculate what the maximum motor speed will be for your specific application.

2. Decide Type of Screw End Fixity

There are three basic types of end fixity (A, C and D). The maximum screw length (L_s) for a given motor speed, unit size and screw diameter will vary depending on the selection. For rotating screw assemblies, the end of the lead screw attached to the motor is considered fixed.

3. Check Critical Screw Speed

Check Critical Speed diagram for your maximum speed, lead screw diameter and end fixity to determine the maximum permissible screw length for your application.

4. Check Column Loading

Another limiting factor for the screw length is how sensitive it is to column loading and how likely it is to buckle under a compression load. Check the Column Load diagram to see that your load and desired maximum screw length are compatible with regards to the unit size, lead screw diameter and end fixity being used.



Lead Screw Sizes

Inch Lead Screws			S = Rotating Screw (MLS), N = Rotating Nut (MLN)									
Linear Travel / Full Step [μ in.]	Lead [in.]	Lead Designator	Motor									
			MLSX8	MLx11		MLx14, MLx17			MLx23			
			Diameter Designator [hundredths of in. diameter]									
			18	18	25	25	31	37	31	37	43	50
0.063 ²	0.013	0013			S ^{1,3}	S,N ^{1,3}	S ^{1,3}	S ^{1,3}	S,N ^{1,3}	S,N ^{1,3}		S ^{1,3}
0.125 ²	0.025	0025			S ^{1,3}	S,N ^{1,3}		S ¹		S,N ¹		S ^{1,3}
0.157 ²	0.031	0031			S	S,N		S ¹		S,N ¹		
0.165 ²	0.033	0033										S ^{1,3}
0.179 ²	0.036	0036			S ^{1,3}	S,N ^{1,3}						
0.200 ²	0.040	0040						S ¹		S,N ¹		
0.209 ²	0.042	0042			S ^{1,3}	S,N ^{1,3}	S ^{1,3}	S ^{1,3}	S,N ^{1,3}	S,N ^{1,3}		
0.250 ²	0.050	0050	S	S,N	S ¹	S,N ¹		S ¹		S,N ¹	S ^{1,3}	S ^{1,3}
0.313 ²	0.063	0063			S	S,N		S		S,N		S ¹
0.394	0.079 ⁴	0079			S ¹	S,N ¹		S ¹		S,N ¹		
0.417 ²	0.083	0083					S	S ¹	S,N	S,N,A ¹		
0.500	0.100	0100	S	S,N				S		S,N		S ¹
0.591	0.118 ⁴	0118			S,A ¹	S,N,A ¹						
0.625	0.125	0125	S ¹	S,N ¹	S	S,N		S ¹		S,N ¹	S ¹	
0.787	0.157 ⁴	0157			S ¹	S,N ¹						
0.833	0.167	0167					S	S	S,N	S,N		
0.960	0.192	0192			S ¹	S,N ¹						
1.000	0.200	0200	S	S,N	S ¹	S,N ¹		S ¹		S,N ¹		S ¹
1.250	0.250	0250			S	S,N	S	S	S,N	S,N	S ¹	S ¹
1.500	0.300	0300						S ¹		S,N,A ¹		
1.665	0.333	0333	S ^{1,3}	S,N ^{1,3}								
1.875	0.375	0375	S ^{1,3}	S,N ^{1,3}				S ¹		S,N ¹		
2.000	0.400	0400	S,A	S,N								
2.500	0.500	0500	S ^{1,3}	S ^{1,3}	S	S,N	S	S	S,N	S,N	S ¹	S ¹
3.750	0.750	0750			S ^{1,3}	S,N ^{1,3}		S ^{1,3}		S,N ^{1,3}		
4.000	0.800	0800										S ^{1,3}
5.000	1.000	1000					S ³	S ³	S,N ³	S,N ³		S ^{1,3}
6.000	1.200	1200						S ^{1,3}		S,N ^{1,3}		
7.500	1.500	1500										S ^{1,3}

1. Some leads may not be available in high-performance nut material or some anti-backlash nuts. Contact Thomson for more detail.

2. Fine-pitched lead screws may have substantially lower load capacities compared to traditional lead screws.

3. Lead screw not available in precision grade accuracy (P).

4. Hybrid threadform consisting of diameter in [in] and lead in [mm] (example: 0.25 in x 2 mm).

Note: Not all available lead screws are shown above. Please contact Thomson for more details.

Metric Lead Screws			S = Rotating Screw (MLS), N = Rotating Nut (MLN)								
Linear Travel / Full Step [μm]	Lead [mm]	Lead Designator	Motor								
			MLSX8	MLx11		MLx14, ML17			MLx23		
			Diameter Designator								
			M04	M04	M06	M06	M08	M10	M08	M10	M12
5	1.0	010	S	S,N	S	S,N					
10	2.0	020					S	S	S,N	S,N	S ¹
15	3.0	030						S		S,N	S ¹
20	4.0	040	SA	S,N			S		S,N		S ¹
25	5.0	050						S		S,N	
30	6.0	060			S,A	S,N		S ¹		S,N ¹	S ¹
40	8.0	080	S ²	S,N ²			S		S,N		
50	10.0	100						S		S,N	S ¹
60	12.0	120			S	S,N	S	S ¹	S,N	S,N ¹	
75	15.0	150									S ¹
80	16.0	160									S ¹
90	18.0	180			S ^{1,2}	S,N ^{1,2}					
100	20.0	200					S ²	S	S,N ²	S,N	
125	25.0	250									S ^{1,2}

1. Some leads may not be available in high-performance nut material or some anti-backlash nuts. Contact Thomson for more detail.

2. Lead screw not available in precision grade accuracy (P).

Note: Not all available lead screws are shown above. Please contact Thomson for more details.



Specifications

Basic Specifications

Lead Screw

Material	300 Series Stainless Steel
Standard Coating ¹	None
Standard Lead Accuracy [in./ft. (µm/300 mm)]	0.010 (250)
Precision Lead Accuracy [in./ft. (µm/300 mm)]	0.003 (75)
Straightness [in./ft. (µm/300 mm)]	0.005 (125)

Lead Nut

Standard Material	Internally lubricated acetal (POM)
High Performance Material	Internally lubricated PEEK
Nut Efficiency ² [%]	Up to 85
Typical Linear Travel Life [in. (km)]	5 × 10 ⁶ (125)
Positional Repeatability with Standard Nut ³ [in. (mm)]	0.005 to 0.010 (0.127 to 0.254)
Positional Repeatability with Anti-Backlash Nut ⁴ [in. (mm)]	<0.002 (0.051)

Motor

Frame Size		NEMA 8	NEMA 11	NEMA 14	NEMA 17	NEMA 23
Step Size	[°]	1.8				
Step Angle Accuracy	[°]	± 0.09				
Max. Axial Load ⁵	[lbs. (N)]	5 (22)	20 (89)	50 (222)	75 (334)	200 (890)
Axial Pre-Load ⁶	[lbs. (N)]	5 (22)	20 (89)	30 (133)	40 (178)	40 (178)
Concentricity of Mounting Pilot to Shaft	[in. (mm)]	0.003 (0.08) TIR				
Perpendicularity of Shaft to Mounting Face	[in. (mm)]	0.003 (0.08) TIR				
Max. Case Temperature	[°F (°C)]	140 (60)		176 (80)		
Storage Temperature	[°F (°C)]	-4 to 122 (-20 to 50)				
Ambient Temperature	[°F (°C)]	-4 to 122 (-20 to 50)				
Max. Humidity (non-condensing)	[%]	85				
Magnet Wire Insulation		Class B 130 °C (266 °F)				
Insulation Resistance		100 Mohm @ 500 VDC				
Dielectric Strength		500 VAC for 1 minute				

Assembly

Max. Backlash with Standard Nut ⁷ [in. (mm)]	0.010 (0.25)
Max. Backlash with XC Anti-Backlash Nut [in. (mm)]	0 (0)
Max Lead Screw Runout ⁸ [in. (mm)]	0.010 (250)
Operating Temperature [°F (°C)]	15 to 125 (-10 to 50)

1. Contact Thomson for optional lead screw coatings.

2. Depending on lead, nut material and lubrication.

3. Depends on nut, load and orientation.

4. For best positional repeatability, load should be kept well below design load of nut.

5. Max. axial load based on a L10 life of 10000 hours of continuous motion at speeds of 100 to 300 RPM.

6. Can be adjusted based on application requirements. If axial load exceeds pre-load of motor, motor shaft may deflect up to 0.003 in. (0.08 mm) for configurations with axial load pulling away from motor face.

7. Nut fit can be adjusted depending on backlash requirements.


8. Assemblies with lead screws exceeding max recommended length may have a higher runout.

Lead Screw Standard End Machining


MLS

MLN


A0

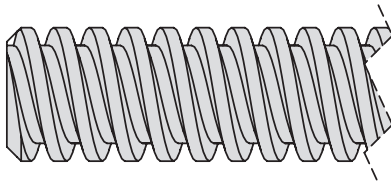

B Type

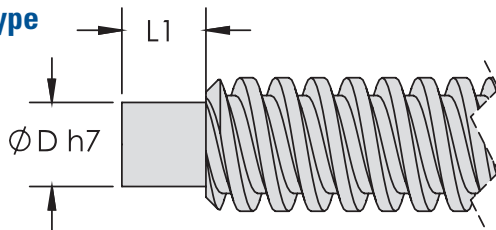


C Type

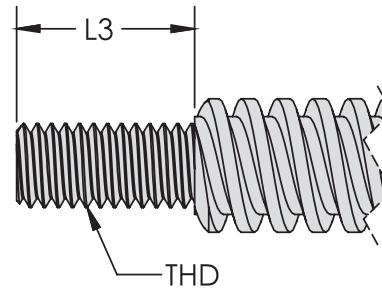

MACH.	in		mm		Compatible Lead Screws
	ØD	L1	ØD	L1	
B1	0.0984	0.098	2.50	2.50	0.188 in, 4 mm, 0.25 in, 6 mm, 0.313 in, 8 mm, 0.375 in, 10 mm
B2	0.1575	0.197	4.00	5.00	0.25 in, 6 mm, 0.313 in, 8 mm, 0.375 in, 10 mm
B3	0.1969	0.197	5.00	5.00	0.313 in, 8 mm, 0.375 in, 10 mm
B4	0.2362	0.236	6.00	6.00	0.375 in, 10 mm

MACH.	in		MACH.	mm		Compatible Lead Screws
	THD	L3		THD	L3	
C1	#4-40	0.250	C5	M2.5X0.45	6.35	0.188 in, 4 mm, 0.25 in, 6 mm, 0.313 in, 8 mm, 0.375 in, 10 mm
C2	#8-32	0.250	C6	M4X0.7	6.35	0.25 in, 6 mm, 0.313 in, 8 mm, 0.375 in, 10 mm
C3	#10-24	0.375	C7	M5X0.8	9.53	0.313 in, 8 mm, 0.375 in, 10 mm
C4	1/4-20	0.500	C8	M6X1.0	12.70	0.375 in, 10 mm

D Type

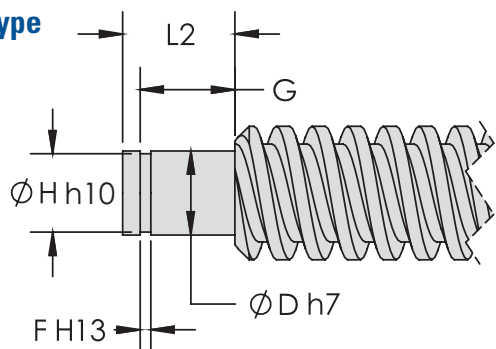

MACH.	in					mm					Compatible Lead Screws
	ØD	L2	G	F	ØH	ØD	L2	G	F	ØH	
D1	0.0984	0.157	0.120	0.022	0.075	2.50	4.00	3.05	0.56	1.91	0.188 in, 4 mm, 0.25 in, 6 mm, 0.313 in, 8 mm, 0.375 in, 10 mm
D2	0.1575	0.256	0.217	0.020	0.150	4.00	6.50	5.51	0.51	3.81	0.25 in, 6 mm, 0.313 in, 8 mm, 0.375 in, 10 mm
D3	0.1969	0.276	0.224	0.028	0.189	5.00	7.00	5.69	0.70	4.80	0.313 in, 8 mm, 0.375 in, 10 mm
D4	0.2362	0.315	0.266	0.030	0.220	6.00	8.00	6.76	0.76	5.59	0.375 in, 10 mm

1. Typical tolerance is +/- 0.005 in (+/- 0.13 mm)

Note: Machining is split into four different categories (A, B, C and D). Within each category are different sizes (X1, X2, X3,...). Please specify exact end machining when configuring part number. Above are examples of the standard end machining offered. Tolerances not specified are typically +/- 0.005 in (+/- 0.13 mm). Contact Thomson for custom end-machining options.



Specifications – MLSX8 Motor Size



Pictured: Size X8A motor (single stack type) with rotating screw (MLSX8A)

Features and Benefits

- NEMA 8 motor (size 21 mm)
- Available in rotating screw (MLS) configurations
- Choose between a variety of inch and metric leads
- Recommended max. thrust force 5 lbs. (22 N). See performance plots for actual load limits
- Recommended max. lead screw length of 4 in. (102 mm)
- Rear-mounted optical encoders available. See pages 36-37 for more details.

Motor Options

Motor Code ¹	Holding Torque		Voltage/phase ²	Current/phase ³	Resistance	Inductance	Power Draw	Step Angle	Motor Length, maximum (Lm)		Rotor Inertia	Motor Weight
	[oz-in]	[mN-m]	[V]	[A]	[Ω]	[mH]	[W]	[°]	[in]	[mm]	[oz-in ²]	[lbs]
MLSX8A05	2.83	20	3.9	0.50	7.7	2	1.9	1.8	1.16	29.5	0.01	0.13

Inch Lead Screw Options⁴

Diameter	Lead	Travel/step	Screw Code
[in.]	[in.]	[in.]	
0.188	0.050	0.00025	180050
	0.100	0.00050	180100
	0.200	0.00100	180200
	0.400	0.00200	180400

Metric Lead Screw Options⁴

Diameter	Lead	Travel/step	Screw Code
[mm]	[mm]	[mm]	
4	1	0.00500	M04010
	4	0.02000	M04040
	8	0.04000	M04080


1. Contact Thomson for additional available motor windings.

2. Applied voltage can be any value above this number as long as output current is controlled at the rated RMS current.


3. For optimal torque output, motor should be driven at 1.41 x RMS current listed above.

4. See lead screw selection matrix on pages 10-11 for other available lead screw configurations. Contact Thomson for more information about custom lead screw availability.

Specifications – MLx11 Motor Size

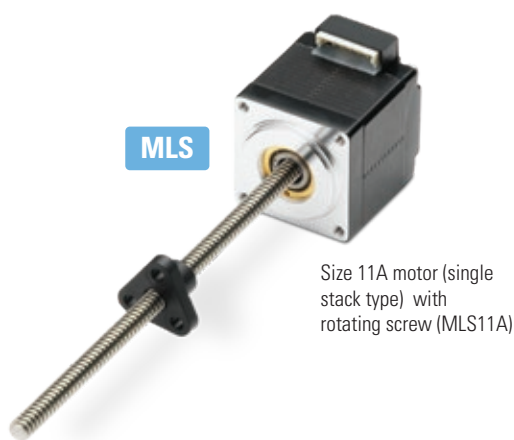

Size 11A motor (single stack type) with rotating screw (MLS11A)

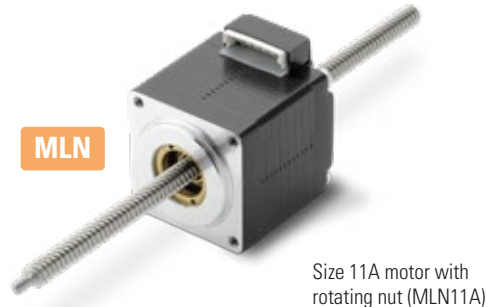

Size 11A motor with rotating nut (MLN11A)

Features and Benefits

- NEMA 11 motor (size 28 mm).
- Choose between a variety of inch and metric lead screws
- Recommended max. thrust force 20 lbs. (89 N).
- Recommended max. lead screw length of 4 in. (102 mm) for MLS / MLN.
- Rear-mounted optical encoders available. See pages 36-37 for more details.

Motor Options

Motor code ¹	Holding torque		Voltage / phase ³ [V]	Current / phase ⁴ [A]	Resistance [Ω]	Inductance [mH]	Power draw [W]	Step angle [°]	Motor length, maximum (Lm)		Rotor inertia [oz-in ²]	Motor weight [lbs]
	[oz-in]	[N-m]							[in]	[mm]		
MLx11A10 ²	10.1	0.071	2.19	1.00	2.19	1.53	2.19	1.8	1.26	32.0	0.06	0.24

Inch Lead Screw Options⁵

Diameter [in.]	Lead [in]	Travel / step [in]	Screw code
0.188 ⁷	0.050	0.00025	180050
	0.100	0.00050	180100
	0.200	0.00100	180200
	0.400	0.00200	180400
0.250 ⁸	0.0313	0.00016	250031
	0.0625	0.00031	250063
	0.1250	0.00063	250125
	0.2500	0.00125	250250
	0.5000	0.00250	250500
	0.7500	0.00375	250750

Metric Lead Screw Options⁵

Diameter [mm]	Lead [mm]	Travel / step [mm]	Screw cod
4	1	0.00500	M04010
	4	0.02000	M04040
	8	0.04000	M04080
6 ⁶	1	0.00500	M06010
	6	0.03000	M06060
	12	0.06000	M06120

1. Contact Thomson for additional available motor windings.

2. "x" denotes placeholder for S or N depending upon configuration.

3. Applied voltage can be any value above this number as long as output current is controlled at the rated RMS current.

4. For optimal torque output, motor should be driven at 1.41 x RMS current listed above.


5. See lead screw selection matrix on pages 10-11 for additional lead screw configurations.

6. Lead screw diameter not compatible with MLN configurations.


Dimensions – MLx11

Dimensions	Projection
Inch [mm]	

MLS Configuration

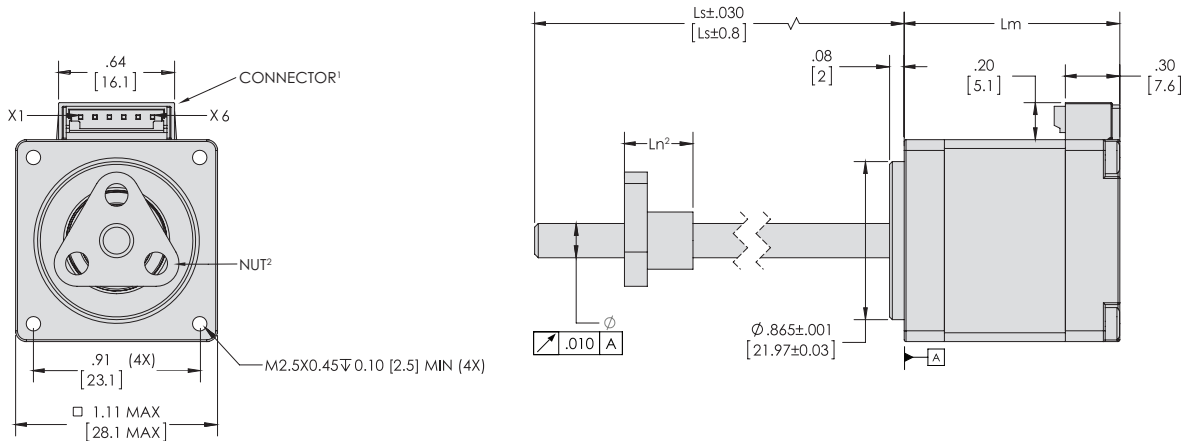

MLN Configuration

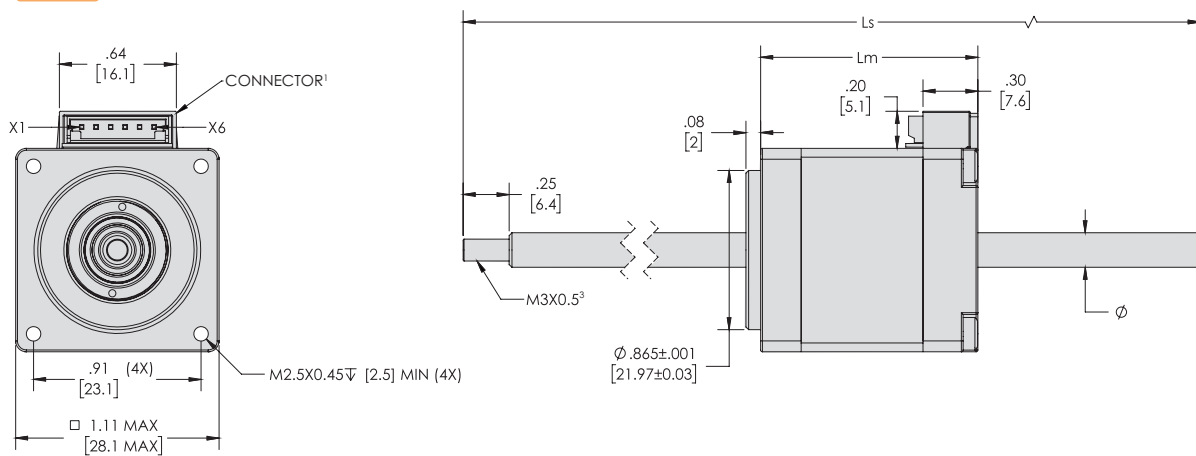


1. Molex 53253-0670 connector shown. Wire harness with Molex 51065-06000 mating connector and flying leads included with motor. For wiring diagram and connector details, see page 41.
2. RSF1800 (RS1) lead nut shown. For additional nut options, see Nut Selection table on pages 32-33.
3. Standard M3x0.5 male threaded end machining shown. For additional end-machining options, see page 13.




MLx11 – Performance Diagrams

MLx11A10

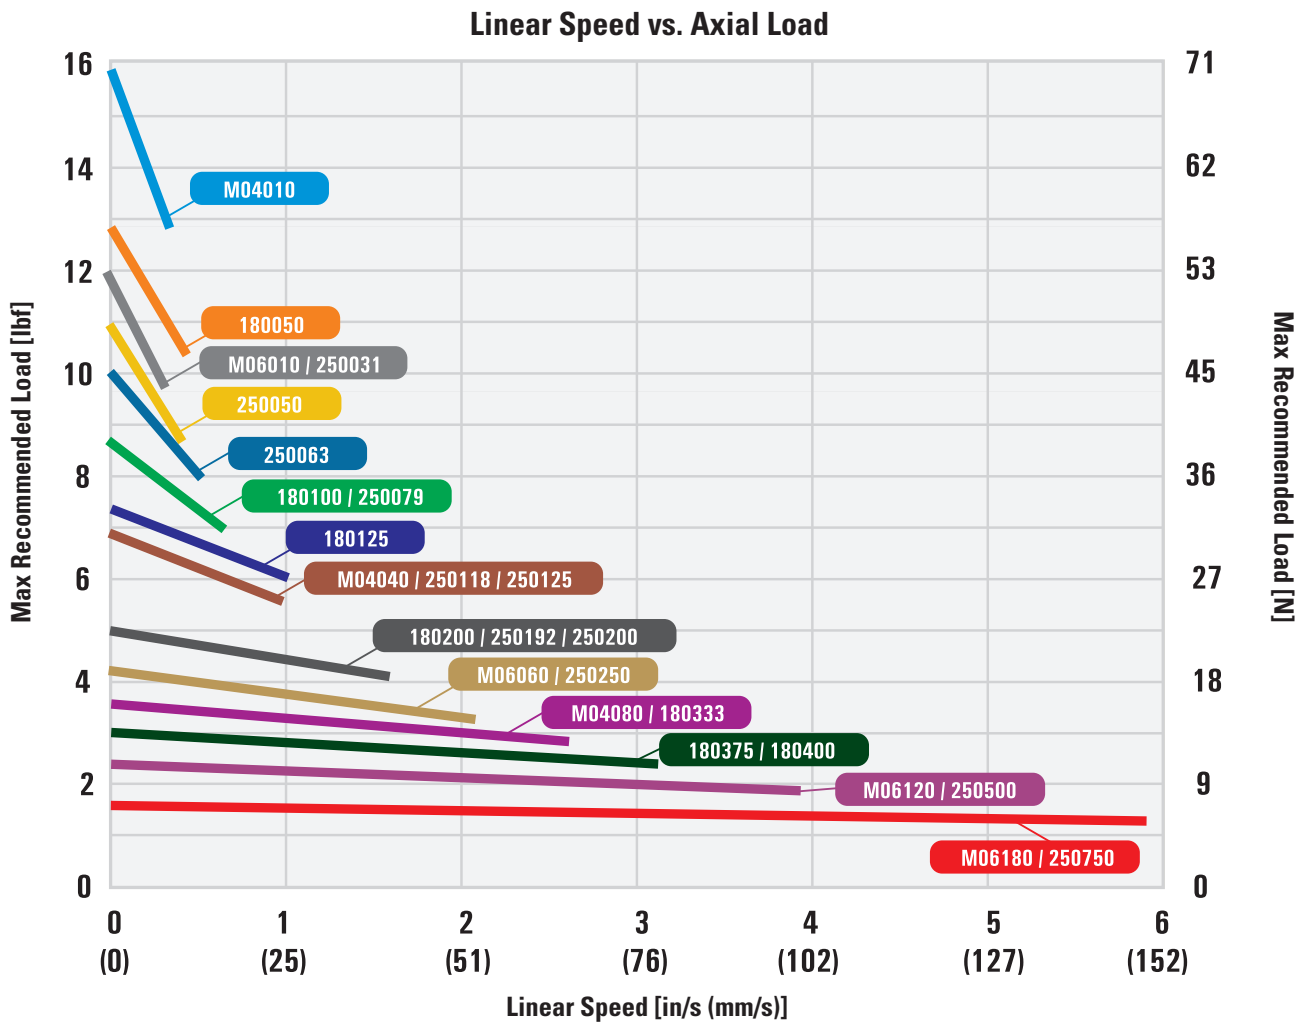

Note: Simplified performance diagrams are theoretical only and assume ideal conditions with a 24 VDC power supply, standard material lead nut and a moderate length, non-lubricated lead screw. Higher loads and speeds can be achieved. For more detailed performance plots and sizing tools, please visit www.thomsonlinear.com/en/products/motorized-lead-screws.

Specifications – MLx14 Motor Size

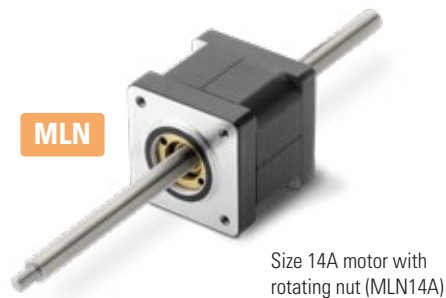

Features and Benefits

- NEMA 14 motor (size 35 mm).
- Choose between a variety of inch and metric lead screws.
- Recommended max. thrust force 50 lbs. (222 N).
- Recommended max. lead screw length of 8 in. (203 mm) for MLS / MLN.
- Rear-mounted optical encoders available. See pages 36-37 for more details.

Motor Options

Motor code ¹	Holding torque		Voltage / phase ³ [V]	Current / phase ⁴ [A]	Resistance [Ω]	Inductance [mH]	Power draw [W]	Step angle [°]	Motor length, maximum (Lm)		Rotor inertia [oz-in ²]	Motor weight [lbs]
	[oz-in]	[N-m]							[in]	[mm]		
MLx14A13 ²	23.0	0.162	1.71	1.35	1.27	1.79	2.31	1.8	1.34	34.0	0.10	0.41

Inch Lead Screw Options⁵

Diameter [in.]	Lead [in]	Travel / step [in]	Screw code
0.250	0.0313	0.00016	250031
	0.0625	0.00031	250063
	0.1250	0.00063	250125
	0.2500	0.00125	250250
	0.5000	0.00250	250500
	0.7500	0.00375	250750

Metric Lead Screw Options⁵

Diameter [mm]	Lead [mm]	Travel / step [mm]	Screw code
6	1	0.00500	M06010
	6	0.03000	M06060
	12	0.06000	M06120

1. Contact Thomson for additional available motor windings.

2. "x" denotes placeholder for S or N depending upon configuration.

3. Applied voltage can be any value above this number as long as output current is controlled at the rated RMS current.


4. For optimal torque output, motor should be driven at 1.41 x RMS current listed above.

5. See lead screw selection matrix on pages 10-11 for additional lead screw configurations.


Dimensions – MLx14

Dimensions	Projection
Inch [mm]	

MLS Configuration

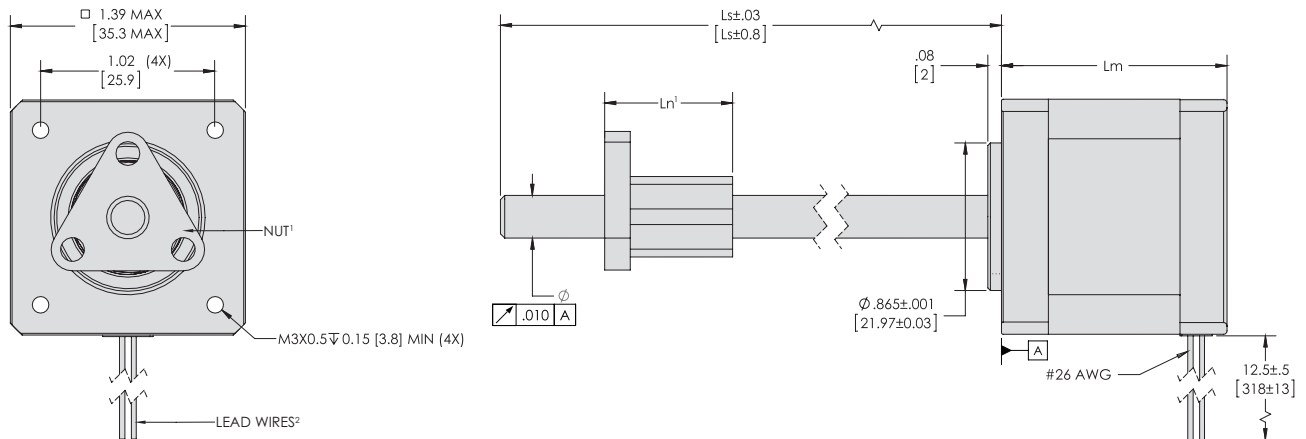


MLN Configuration

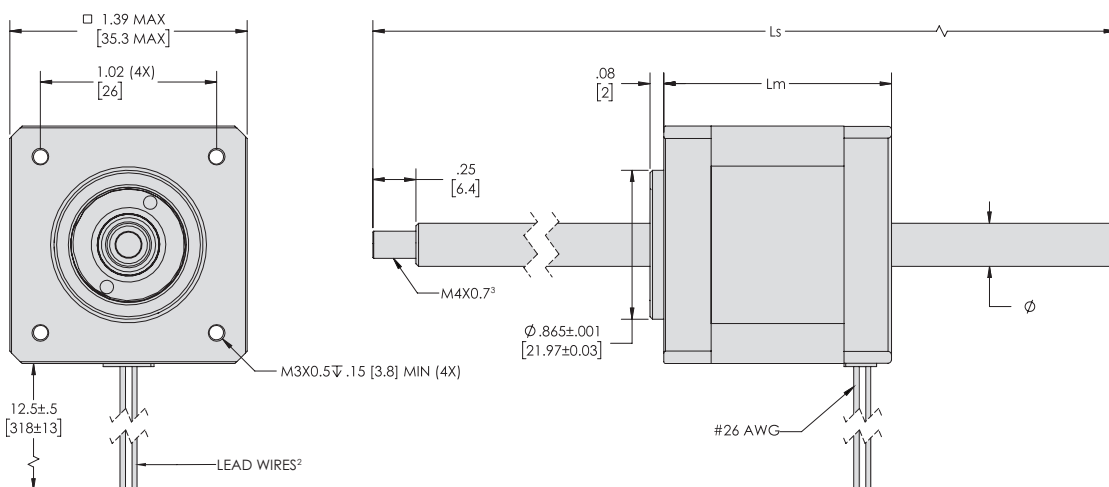

1. RSF2500 (RS2) lead nut shown. For additional nut options, see Nut Selection table on pages 32-33.
2. Motor comes standard with flying leads. For wiring diagram details, see page 41.
3. Standard M4x0.7 male threaded end machining shown. For additional end machining options, see page 13.

MLx14 – Performance Diagrams

MLx14A13

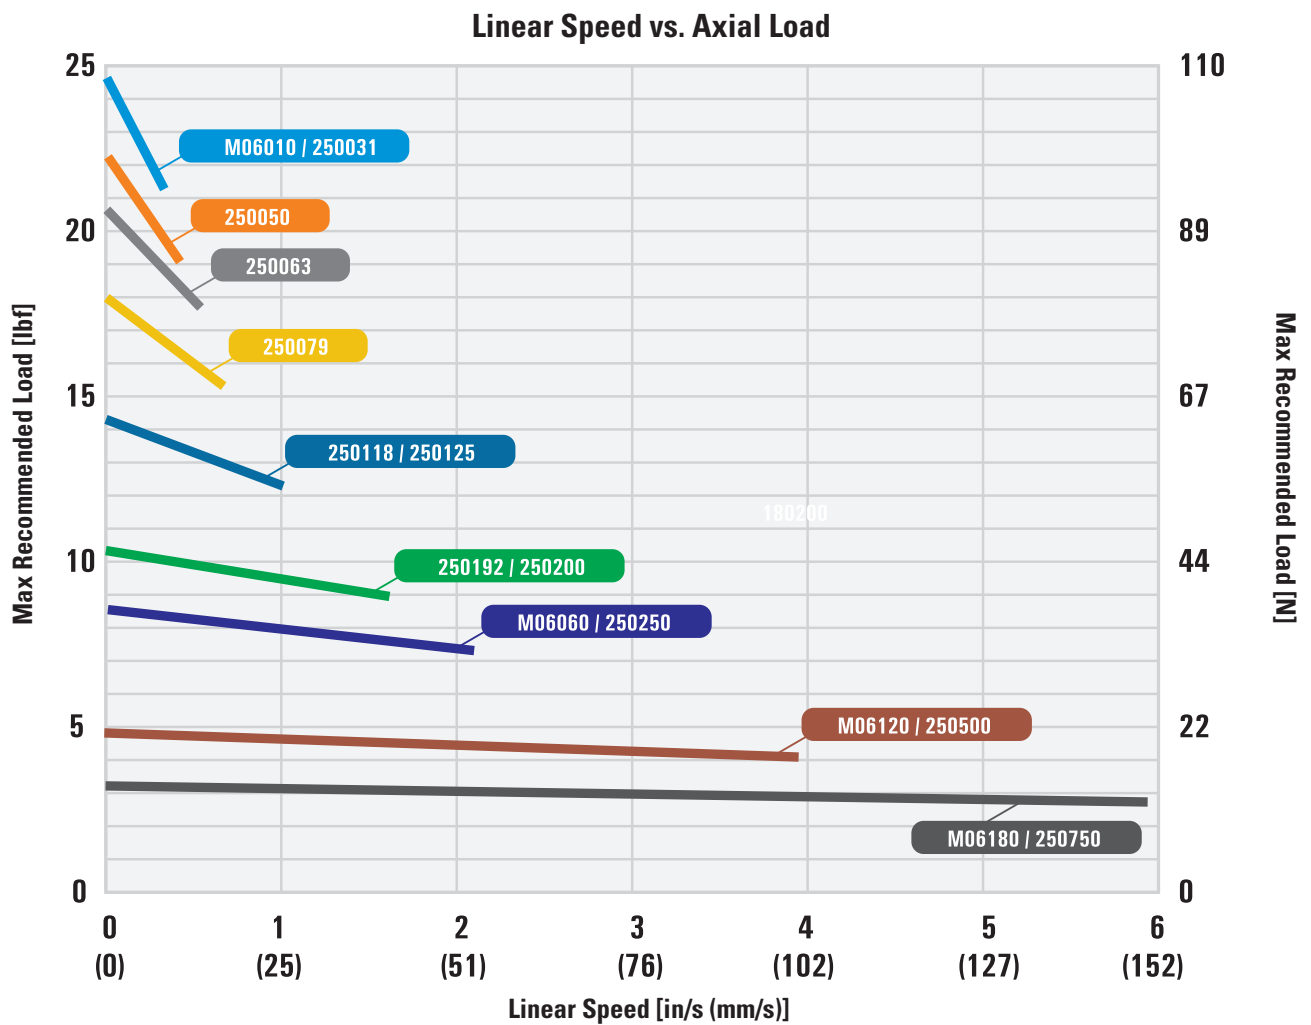

Note: Simplified performance diagrams are theoretical only and assume ideal conditions with a 24 VDC power supply, standard material lead nut and a moderate length, non-lubricated lead screw. Higher loads and speeds can be achieved. For more detailed performance plots and sizing tools, please visit www.thomsonlinear.com/en/products/motorized-lead-screws.



Specifications – MLx17 Motor Size



Features and Benefits

- NEMA 17 motor (size 42 mm).
- Choose between a variety of inch and metric lead screws.
- Recommended max. thrust force 75 lbs (334 N).
- Recommended max. lead screw length of 8 in. (203 mm) for MLS / MLN.
- Rear-mounted optical encoders available. See pages 36-37 for more details.

Motor Options

Motor code ¹	Holding torque		Voltage / phase ³ [V]	Current / phase ⁴ [A]	Resistance [Ω]	Inductance [mH]	Power draw [W]	Step angle [°]	Motor length, maximum (Lm)		Rotor inertia [oz-in ²]	Motor weight [lbs]
	[oz-in]	[N-m]							[in]	[mm]		
MLx17A15 ²	92.0	0.650	1.76	1.50	1.17	3.26	2.63	1.8	1.34	34.0	0.23	0.4
MLx17B15 ²	102.8	0.726	1.31	1.50	0.87	2.7	1.96	1.8	1.89	48.0	0.47	0.7

Inch Lead Screw Options⁵

Diameter [in]	Lead [in]	Travel / step [in]	Screw code
0.250	0.0313	0.00016	250031
	0.0625	0.00031	250063
	0.1250	0.00063	250125
	0.2500	0.00125	250250
	0.5000	0.00250	250500
	0.7500	0.00375	250750

Metric Lead Screw Options⁵

Diameter [mm]	Lead [mm]	Travel / step [mm]	Screw code
6	1	0.00500	M06010
	6	0.03000	M06060
	12	0.06000	M06120

1. Contact Thomson for additional available motor windings.

2. "x" denotes placeholder for S or N depending upon configuration.

3. Applied voltage can be any value above this number as long as output current is controlled at the rated RMS current.


4. For optimal torque output, motor should be driven at 1.41 x RMS current listed above.

5. See lead screw selection matrix on pages 10-11 for additional lead screw configurations.


Dimensions – MLx17

Dimensions	Projection
Inch [mm]	

MLS Configuration

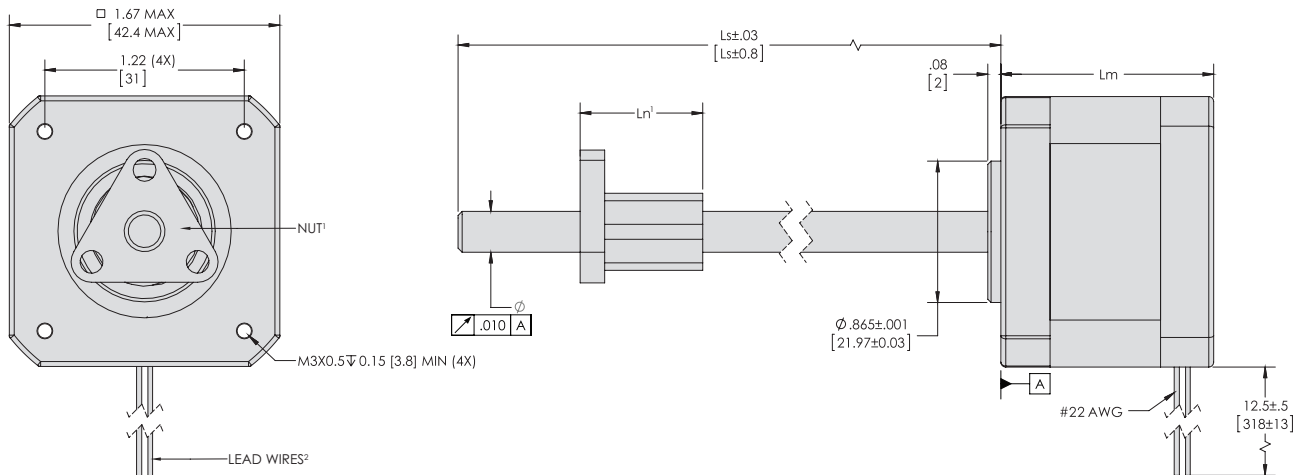

MLN Configuration

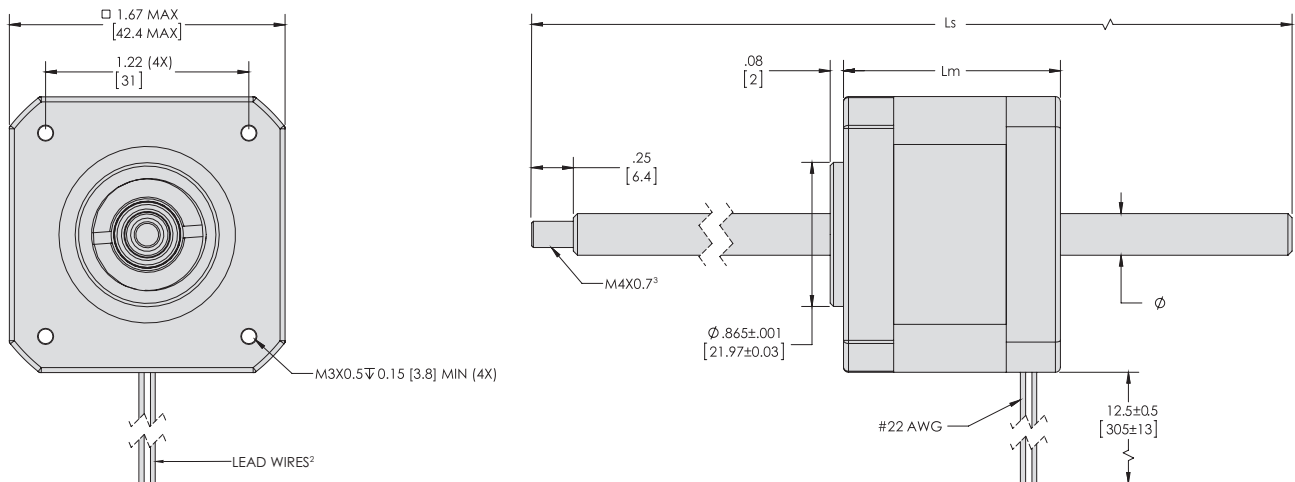


1. RSF2500 (RS2) lead nut shown. For additional nut options, see Nut Selection table on pages 32-33.
2. Motor comes standard with flying leads. For wiring diagram details, see page 41.
3. Standard M4x0.7 male threaded end machining shown. For additional end machining options, see page 13.




ML17 – Performance Diagrams

MLx17A15

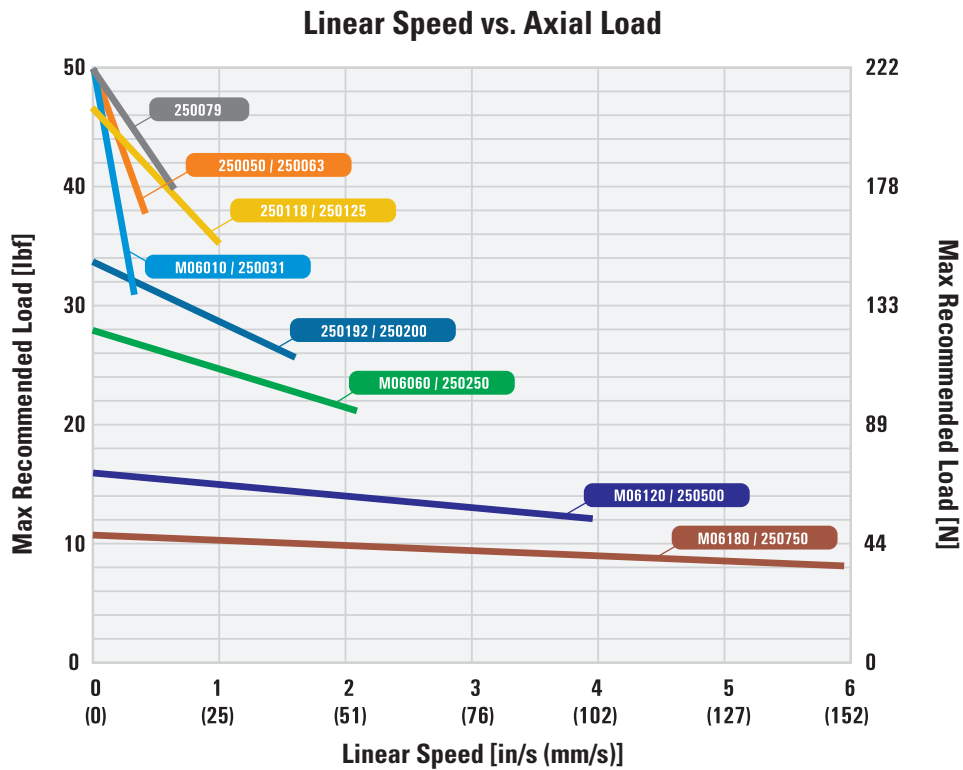


MLx17B15

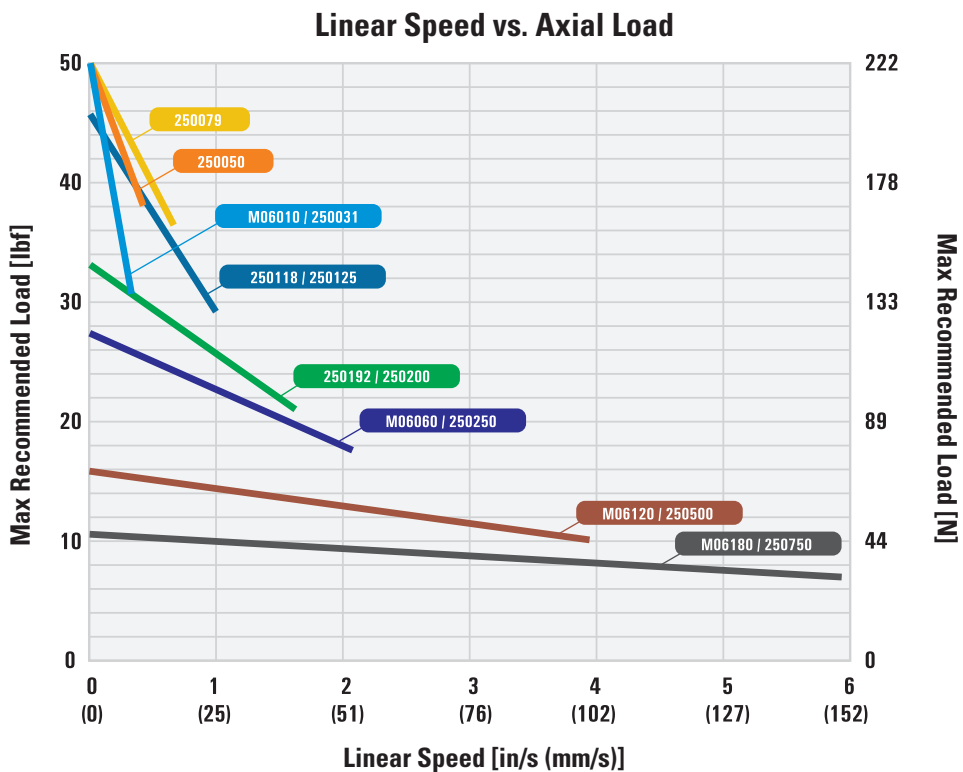

Note: Simplified performance diagrams are theoretical only and assume ideal conditions with a 24 VDC power supply, standard material lead nut and a moderate length, non-lubricated lead screw. Higher loads and speeds can be achieved. For more detailed performance plots and sizing tools, please visit www.thomsonlinear.com/en/products/motorized-lead-screws.

Specifications – MLx23 Motor Size

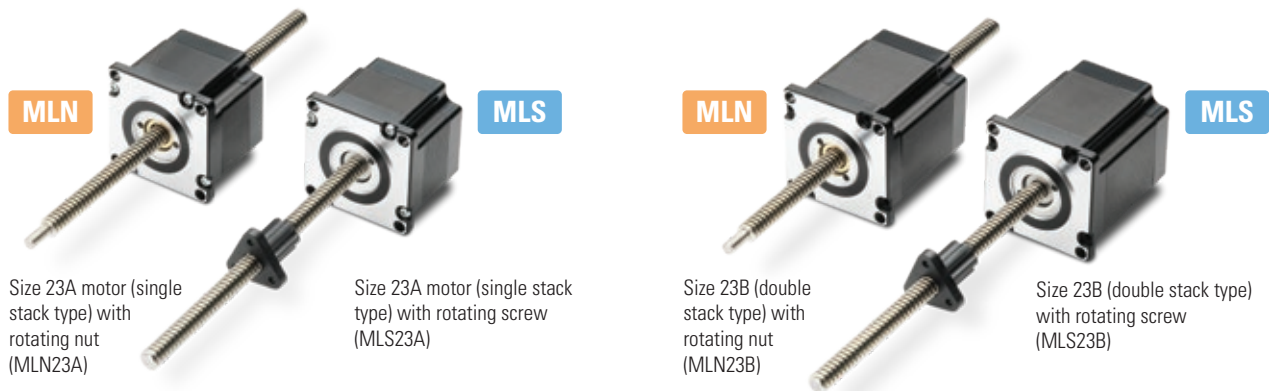

Features and Benefits

- NEMA 23 motor (size 57 mm).
- Choose between a variety of inch and metric lead screws.
- Recommended max. thrust force 200 lbs. (890 N).
- Recommended max. lead screw length for 0.313 in. (8 mm) diameter is 12 in. (305 mm) / max. lead screw length for 0.375 in. (10 mm) diameter is 16 in. (406 mm).
- Rear-mounted optical encoders available. See pages 36-37 for more details.

Motor Options

Motor code ¹	Holding torque		Voltage / phase ³ [V]	Current / phase ⁴ [A]	Resistance [Ω]	Inductance [mH]	Power draw [W]	Step angle [°]	Motor length, maximum (Lm)		Rotor inertia [oz-in ²]	Motor weight [lbs]
	[oz-in]	[N-m]							[in]	[mm]		
MLx23A15 ²	121.0	0.854	3.77	1.55	2.43	4.20	5.84	1.8	1.78	45.2	1.04	1.13
MLx23A30 ²	123.8	0.875	1.74	3.00	0.58	1.16	5.22	1.8	1.78	45.2	1.04	1.13
MLx23B19 ²	251.2	1.774	3.80	1.90	2.00	5.84	7.22	1.8	2.59	65.8	2.13	1.70

Inch Lead Screw Options⁵

Diameter [in]	Lead [in]	Travel / step [in]	Screw code
0.313	0.083	0.00042	310083
	0.167	0.00083	310167
	0.250	0.00125	310250
	0.500	0.00250	310500
	1.000	0.00500	311000
0.375	0.063	0.00031	370063
	0.100	0.00050	370100
	0.167	0.00083	370167
	0.250	0.00125	370250
	0.500	0.00250	370500
	1.000	0.00500	371000

Metric Lead Screw Options⁵

Diameter [mm]	Lead [mm]	Travel / step [mm]	Screw code
8	2	0.01000	M08020
	4	0.02000	M08040
	8	0.04000	M08080
	12	0.06000	M08120
	20	0.10000	M08200
10	2	0.01000	M10020
	3	0.01500	M10030
	5	0.02500	M10050
	10	0.05000	M10100
	20	0.10000	M10200

1. Contact Thomson for additional available motor windings.

2. "x" denotes placeholder for S or N depending upon configuration.

3. Applied voltage can be any value above this number as long as output current is controlled at the rated RMS current.



4. For optimal torque output, motor should be driven at 1.41 x RMS current listed above.

5. See lead screw selection matrix on pages 10-11 for additional lead screw configurations.



MLx23 – Dimensions

Dimensions	Projection
Inch [mm]	

MLS Configuration

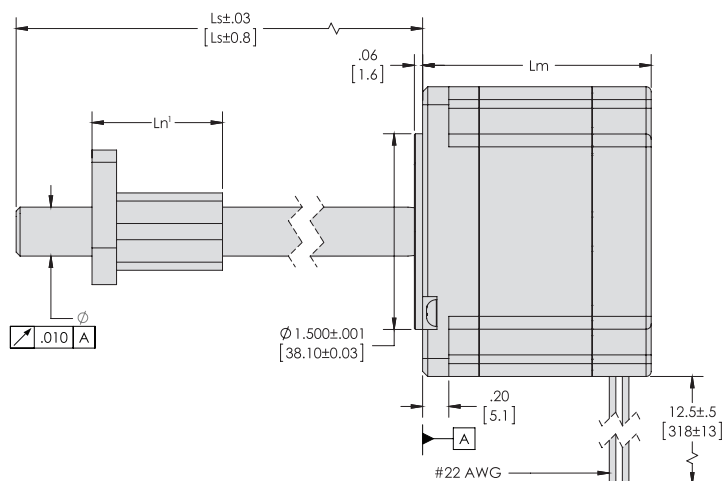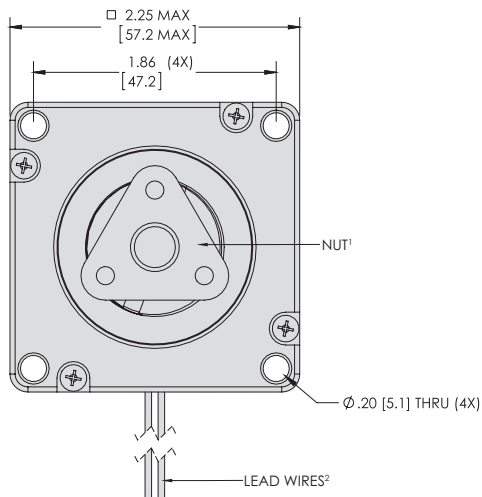


MLN Configuration

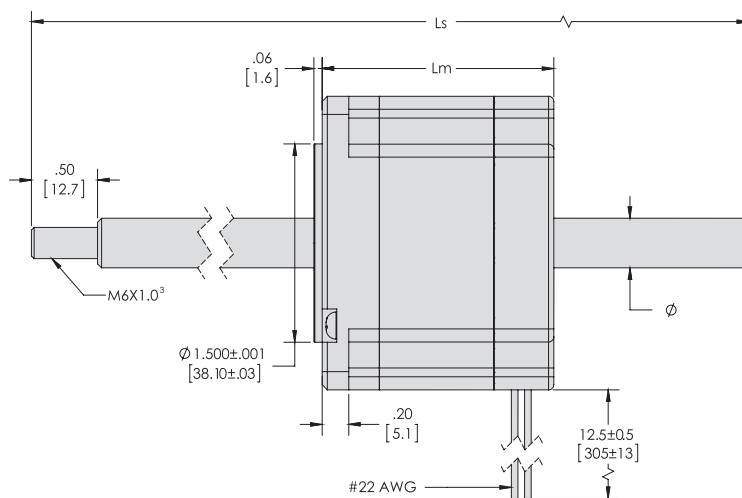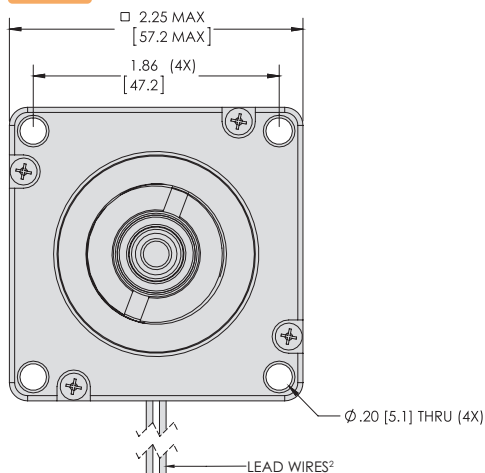


1. RSF3700 (RS3) lead nut shown. For additional nut options, see Nut Selection table on pages 32-33.
2. Motor comes standard with flying leads. For wiring diagram details, see page 41.
3. Standard M6x1.0 male threaded end machining shown. For additional end machining options, see page 13.

ML23 – Performance Diagrams

MLx23A15

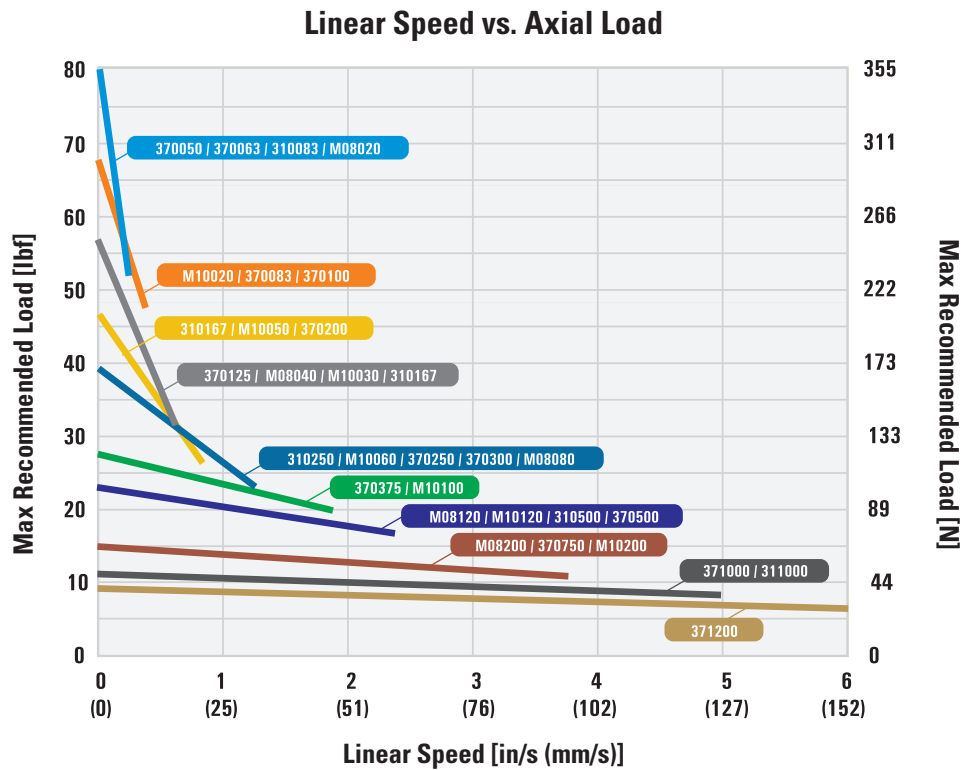

MLx23B19

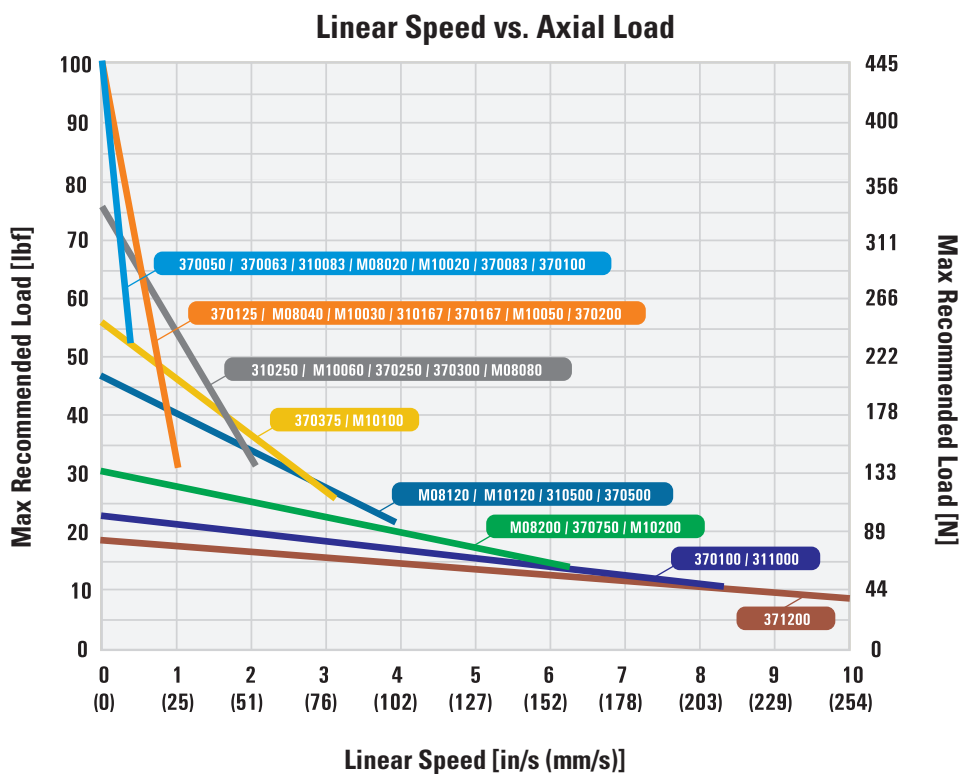


Note: Simplified performance diagrams are theoretical only and assume ideal conditions with a 24 VDC power supply, standard material lead nut and a moderate length, non-lubricated lead screw. Higher loads and speeds can be achieved. For more detailed performance plots and sizing tools, please visit www.thomsonlinear.com/en/products/motorized-lead-screws.



ML23 – Performance Diagrams

ML23A30

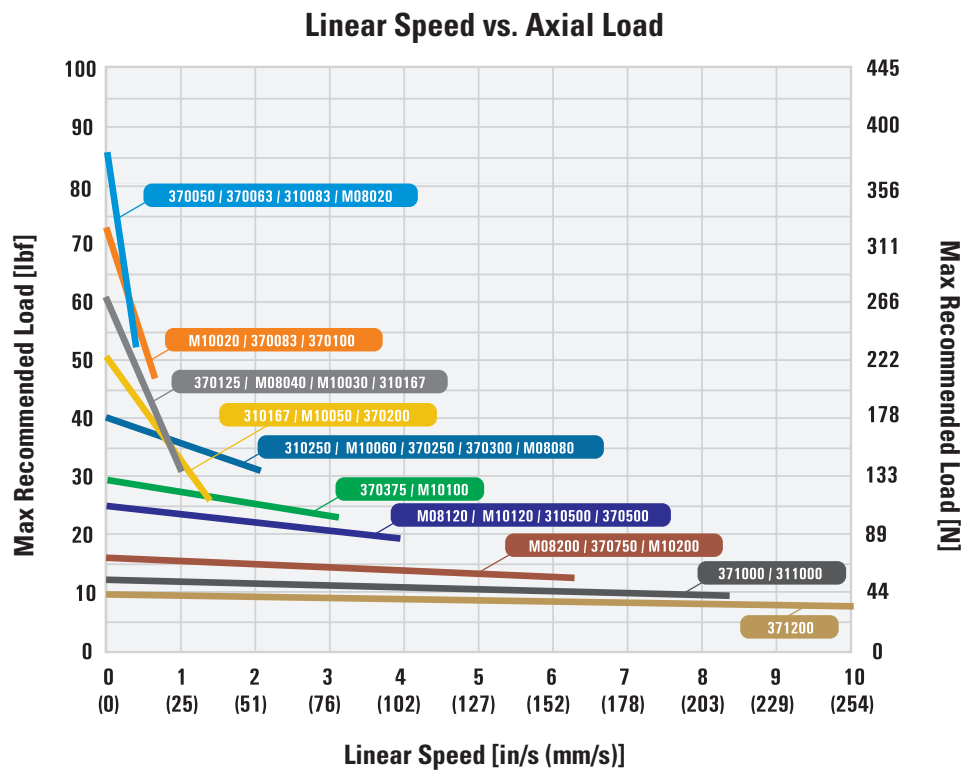

Note: Simplified performance diagrams are theoretical only and assume ideal conditions with a 24 VDC power supply, standard material lead nut and a moderate length, non-lubricated lead screw. Higher loads and speeds can be achieved. For more detailed performance plots and sizing tools, please visit www.thomsonlinear.com/en/products/motorized-lead-screws.

Product Selection Overview

The successful integration of a stepper motor linear actuator in an application is primarily dependent on the screw alignment and subsequent screw runout. If incorrectly mounted, a lead screw assembly will have significantly reduced system life and may be noisy or inaccurate. Thomson methodically straightens all screws prior to assembly to minimize vibration and runout. The Taper-Lock coupling method also was designed to provide a concentric interface and optimize alignment. Proper alignment, end support configuration and lead nut selection are important factors to achieve a well designed installation that will exceed expectations.

1. Select Stepper Motor Linear Actuator Configuration

Determine which of the configurations – rotating screw (MLS) or rotating nut (MLN) – the application requires. See pages 6-7 for application examples.

2. Select Motor Size

Select the appropriate size based on desired performance, motor frame size, etc. Thomson offers five base models (MLSX8, MLx11, MLx14, MLx17 and MLx23) in various motor windings, linear travels and load capacities.

3. Select Lead Screw Configuration and End Machining






For MLS or MLN, select the lead screw diameter and length with regard to the required stroke of the application and the type of end machining the screw requires.

4. Select Nut

For rotating screw (MLS) configurations, choose between various nut mounting styles, materials, and backlash options. Rotating nut (MLN) configurations as default always come in a high performance material, standard backlash nut.

5. Mount the Stepper Motor Linear Actuator

Mount the unit into your assembly.

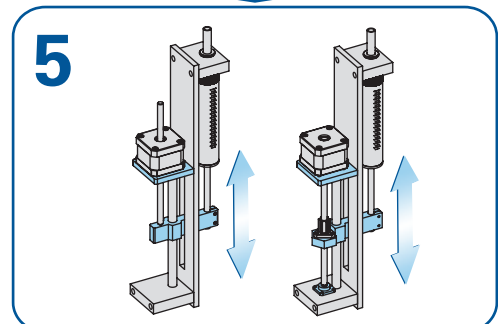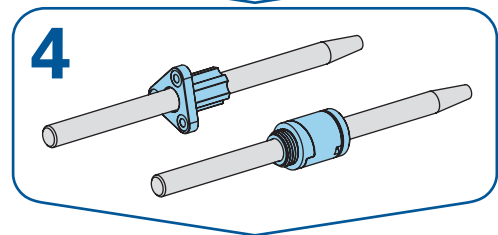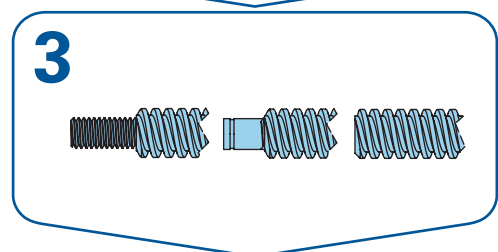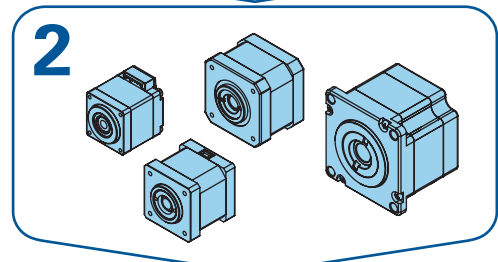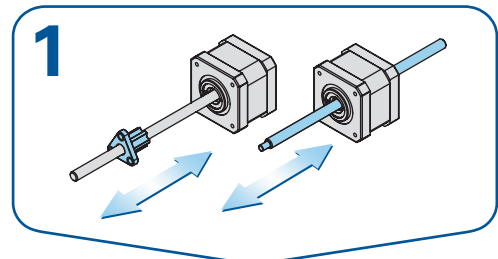



Nut Selection

Lead Nut						
Series	Image	Part Number	P/N Ref. ¹	Compatible Motor(s)	Catalog Design Load ² (lbf)	
RSF		RSF1800	RS1	08, 11	10	
		RSF2500	RS2	11, 14, 17	25	
		RSF3700	RS3	14, 17, 23	60	
RSFH		RSFH1800	RH1	08, 11	20	
		RSFH2500	RH2	11, 14, 17	50	
		RSFH3700	RH3	14, 17, 23	120	
XC ³		XCMF1800	XF1	08, 11	5	
		XCMT1800	XT1	08, 11	5	
		XCMF2500	XF1	11, 14, 17	5	
		XCMT2500	XT1	11, 14, 18	5	
		XCF3700SH	FS3	14, 17, 23	25	
		XCT3700SH	TS3	14, 17, 23	25	
		XCF3700	XF3	14, 17, 23	25	
		XCT3700	XT3	14, 17, 23	25	
		XCF5000	XF5	23	125	
		XCT5000	XT5	23	125	
		XCF2500	XF2	11, 14, 17	10	
		XCT2500	XT2	11, 14, 17	10	
MTS		MTS1800	MT2	08, 11	10	
		MTS2500	MT2	14, 17	10	
		MTS3100	MT2	14, 17, 23	50	
		MTS3700	MT3	14, 17, 23	60	
		MTS4300	MT3	14, 17, 23	60	
		MTS5000	MT5	14, 17, 23	125	
SN		SN1800	SN2	08, 11	30	
		SN2500	SN2	14, 17	45	
		SN3100	SN3	14, 17, 23	70	
		SN3700	SN3	14, 17, 23	70	
		SN5000	SN5	14, 17, 23	100	
AFT		AFT2500	AF2	14, 17	5	
		AFT3700	AF3	14, 17, 23	10	
		AFT5000	AF5	23	25	
SNAB ⁴		SNAB1800	SB2	08, 11	10	
		SNAB2500	SB2	14, 17	25	
		SNAB3100	SB3	14, 17, 23	50	
		SNAB3700	SB3	14, 17, 23	70	
		SNAB5000	SB5	14, 17, 23	150	

1. Three-digit reference to be used within the full MLS part number.


2. Approximate max running load assuming 500 RPM and 50% duty cycle. For more detailed design limitations and sizing, contact Thomson.

3. Some high-lead configurations are not available for the XC nut.

4. Preload force is lower than stated design load. Exceeding preload force will cause spring to fully compress, and nut will lose anti-backlash properties. Preload force values: SNAB1800/SNAB2500 = 1-3 lbs, SNAB3100/3700 = 2-5 lbs, and SNAB5000 = 4-9 lbs.

	Lead Screw											
	0.188 in.	4 mm	0.25 in.	6 mm	0.313 in.	8 mm	0.375 in.	10 mm	0.43 in.	0.50 in.	12 mm	About
	x	x										Standard triangular flange bearing grade acetal nut used on stepper motor linear actuators.
			x	x								
					x	x	x	x				
	x	x										Higher performance bearing grade PEEK alternative to standard RSF nut used on stepper motor linear actuators. Capable of withstanding higher loads, speeds and temperature requirements.
			x	x								
					x	x	x	x				
	x	x										Standard triangular flange / thread mount XC nuts used for 0.188 in. (4 mm) lead screws.
	x	x										
			x	x								Standard triangular flange / thread mount XC nuts used for 0.25 in. (6 mm) lead screws.
			x	x								
					x	x	x	x				Standard triangular flange / thread mount XC nuts used for 0.313 in. (8 mm) and 0.375 in. (10 mm) lead screws with short nut body length.
					x	x	x	x				
					x	x	x	x				
					x	x	x	x				
									x	x	x	Standard round flange / thread mount XC nuts used for 0.5 in. (12 mm) lead screws.
									x	x	x	
			x	x								Flat flange (2-hole) and larger nut body alternative to XCM nut for 0.25 in. (6 mm) lead screws when a higher design load is required.
			x	x								
			x	x								Triangular and round flange alternative to RSF nut. Identical bearing grade material but with overall larger dimensions over RSF nut.
					x	x						
							x	x				
									x			
										x	x	
	x											Thread mount bearing grade acetal nut with standard backlash.
			x	x								
					x	x						
							x	x				
								x	x	x		
			x	x								Triangular flange alternative anti-backlash nut.
					x	x	x	x	x			
										x	x	
	x	x										Thread mount alternative anti-backlash nut.
			x	x								
					x	x						
							x	x				
								x	x	x		

General Nut Dimensions

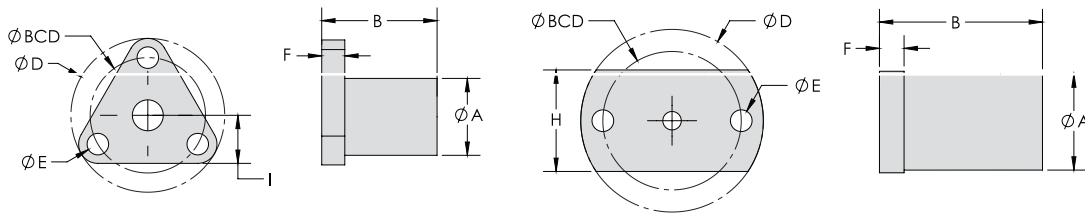


RSF, MTS3700, XCF3700, XCMF, AFT2500 and AFT5000

XCF2500

Lead Nut	Series	RSF/RSFH			XC								
	P/N	RSF1800 / RSFH1800 (RS1 / RH1)	RSF2500 / RSFH2500 (RS2 / RH2)	RSF3700 / RSFH3700 (RS3 / RH3)	XCMF1800 / XCMF2500 (XF1 / XF1)	XCF3700SH (FS3)	XCF5000 (XF5)	XCF2500 (XF2)	XCMT1800 / XCMT2500 (XT1 / XT1)	XCT3700SH (TS3)	XCT5000 (XT5)	XCT2500 (XT2)	
Dimensions [in (mm)]	A	0.313 (7.95)	0.5 (12.7)	0.63 (16)	0.5 (12.7)	0.81 (20.57)	1.12 (28.44)	0.64 (16.25)	0.5 (12.7)	0.81 (20.57)	1.12 (28.44)	0.64 (16.25)	
	B ¹	0.375 (9.52)	0.75 (19.05)	1 (25.4)	0.9 (22.86)	1.34 (34.03)	2.25 (57.15)	1.18 (29.97)	0.9 (22.86)	1.34 (34.03)	2.25 (57.15)	1.18 (29.97)	
	C	-	-	-	-	-	-	-	0.2 (5.08)	0.25 (6.35)	0.375 (9.52)	0.187 (4.74)	
	D	0.75 (19.05)	1 (25.4)	1.25 (31.75)	1 (25.4)	1.53 (38.86)	1.75 (44.45)	1.19 (30.22)	-	-	-	-	
	E	0.13 (3.3)	0.14 (3.55)	0.14 (3.55)	0.14 (3.55)	0.197 (5)	0.2 (5.08)	0.141 (3.58)	-	-	-	-	
	F	0.13 (3.3)	0.15 (3.81)	0.19 (4.82)	0.18 (4.57)	0.2 (5.08)	0.3 (7.62)	0.16 (4.06)	-	-	-	-	
	G	-	-	-	-	-	-	-	-	-	-	-	
	H	-	-	-	-	-	-	0.66 (16.76)	-	-	-	-	
	I	0.25 (6.35)	0.31 (7.87)	0.41 (10.41)	0.31 (7.87)	0.48 (20.32)	-	-	-	-	-	-	
	J	-	-	-	-	-	-	-	-	-	-	-	
	BCD	0.5 (12.7)	0.75 (19.05)	0.875 (22.22)	0.75 (19.05)	1.125 (28.57)	1.406 (35.71)	0.9 (22.86)	-	-	-	-	
	THD ²	-	-	-	-	-	-	-	7/16-20	5/8-18	15/16-16	9/16-18	

1. Dimension B shown is max length.

2. Metric mounting thread available. Contact Thomson for more information.

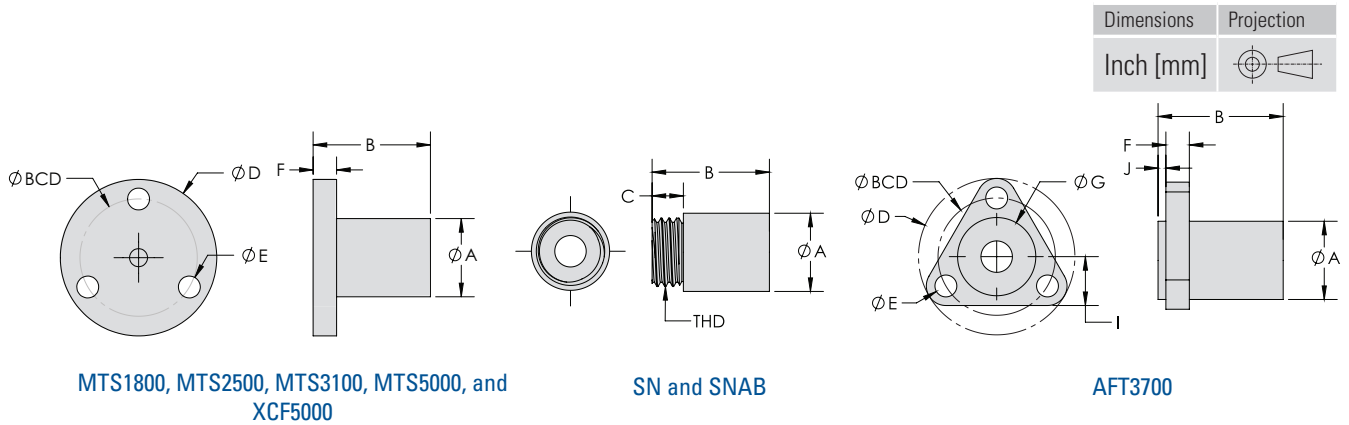

	Lead Nut	Series	MTS			SN			AFT			SNAB		
		P/N	MTS1800 / MTS2500 / MTS3100 (MT2 / MT2 / MT2)	MTS3700 / MTS4300 (MT3 / MT3)	MTS5000 (MT5)	SN1800 / SN2500 (SN2 / SN2)	SN3100 / SN3700 (SN3 / SN3)	SN5000 (SN5)	AFT2500 (AF2)	AFT3700 (AF3)	AFT5000 (AF5)	SNAB1800 / SNAB2500 (SB2 / SB2)	SNAB3100 / SNAB3700 (SB3 / SB3)	SNAB5000 (SB5)
	Dimensions	A	0.5 (12.7)	0.71 (18.03)	0.75 (19.05)	0.625 (15.87)	0.75 (19.05)	1 (25.4)	0.5 (12.7)	0.77 (19.55)	0.88 (22.35)	0.625 (15.87)	0.75 (19.05)	1 (25.4)
		B ¹	0.75 (19.05)	1.5 (38.1)	1.5 (38.1)	0.5 (12.7)	0.75 (19.05)	1 (25.4)	0.99 (25.14)	2 (50.8)	2.03 (51.56)	1.25 (31.75)	1.34 (34.03)	2 (50.8)
		C	-	-	-	0.187 (4.74)	0.25 (6.35)	0.375 (9.52)	-	-	-	0.187 (4.74)	0.25 (6.35)	0.375 (9.52)
		D	1 (25.4)	1.5 (38.1)	1.5 (38.1)	-	-	-	1 (25.4)	1.5 (38.1)	1.62 (41.14)	-	-	-
		E	0.14 (3.55)	0.2 (5.08)	0.2 (5.08)	-	-	-	0.14 (3.55)	0.2 (5.08)	0.2 (5.08)	-	-	-
		F	0.15 (3.81)	0.2 (5.08)	0.25 (6.35)	-	-	-	0.18 (4.57)	0.2 (5.08)	0.25 (6.35)	-	-	-
		G	-	-	-	-	-	-	-	0.71 (18.03)	-	-	-	-
		H	-	-	-	-	-	-	-	-	-	-	-	-
		I	-	0.469 (11.91)	-	-	-	-	0.313 (7.95)	0.469 (11.91)	0.5 (12.7)	-	-	-
		J	-	-	-	-	-	-	-	0.06 (1.5)	-	-	-	-
		BCD	0.75 (19.05)	1.125 (28.57)	1.125 (28.57)	-	-	-	0.75 (19.05)	1.125 (28.57)	1.25 (31.75)	-	-	-
		THD ²	-	-	-	9/16-18	5/8-18	15/16-16	-	-	-	9/16-18	5/8-18	15/16-16

Specifications – Encoders



Pictured: MLS17A with E5 encoder (left) and MLN17B with E2 encoder

Features and Benefits

- Available for all standard MLS and MLN motor configurations
- Two channel quadrature square wave outputs with optional third channel index output
- Various cycles per revolution (CPR) or pulses per revolution (PPR) available – from 32 to 10,000 CPR or 128 to 40,000 PPR

Available Encoder Configurations


Motor Size	CPR	Index	Output	Encoder Model
MLSX8	100, 108, 120, 125, 128, 144, 200, 248, 250, 256, 296, 300, 360, 400, 500, 512, 720, 800, 1000	Non-Index	Single-Ended or Differential	E4T
MLx11, 14, 17	32 ¹ , 50, 96, 100, 120 ¹ , 192, 200, 250, 256, 360, 400, 500, 512, 540, 720, 900, 1000, 1024, 1250, 2000 ² , 2048 ² , 2500 ² , 4000 ² , 4096 ² , 5000 ²	Index or Non-Index	Single-Ended	E2
	32 ¹ , 50, 96, 100, 192, 200, 250, 256, 360, 400, 500, 512, 540, 720, 900, 1000, 1024, 1250, 2000 ² , 2048 ² , 2500 ² , 4000 ² , 4096 ² , 5000 ²		Single-Ended or Differential	E5
MLx17, 23	64 ¹ , 100, 200, 400, 500, 512, 1000, 1024, 1800, 2000, 2048, 2500, 3600 ² , 4000 ² , 4096 ² , 5000 ² , 7200 ² , 8000 ² , 8192 ² , 10000 ²	Index or Non-Index	Single-Ended	E3
	64 ¹ , 100, 200, 400, 500, 512, 800 ² , 1000, 1024, 1800, 2000, 2048, 2500, 3600 ² , 4000 ² , 4096 ² , 5000 ² , 7200 ² , 8000 ² , 8192 ² , 10000 ²		Single-Ended or Differential	E6

1. CPR available with Non-Index only

2. CPR available with Index only

Note: Please specify encoder model, CPR, Index and Output (if applicable)

Dimensions – Encoders

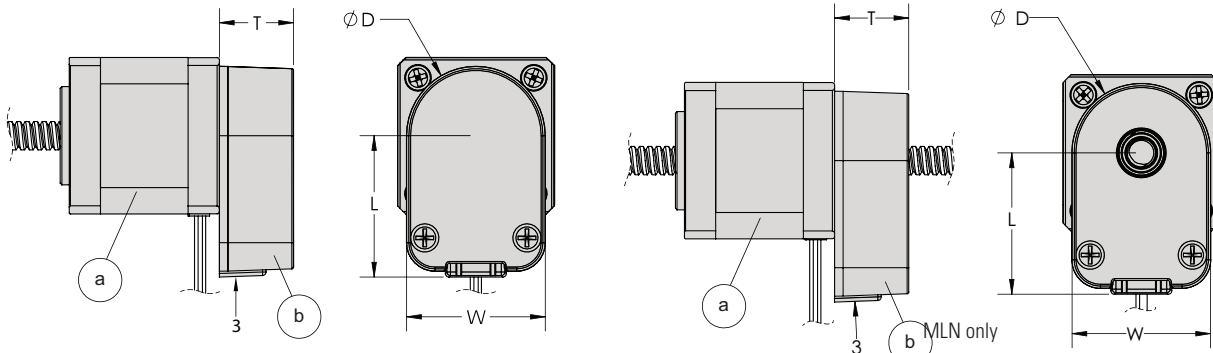

Encoder Specifications

Encoder	Dimensions (inch [mm])				Mating Connector ^{1,2}	Supply Voltage ⁴ (VDC)			Operating Temperature (°F [°C])		Max Acceleration (rad/sec ²)
	T	L	D	W	US Digital	Min	Typ	Max	Min	Max	Max
E2	0.62 [15.7]	0.82 [20.8]	1.19 [30.2]	1.19 [30.2]	CON-C5 CON-LC5	4.5	5.0	5.5	-40 [-40] (CPR<2000) -25 [-13] (CPR≥2000)	212 [100]	250,000
E3		1.30 [33.1]	2.2 [55.9]	1.62 [41.1]							
E4T	0.45 [11.3]	0.51 [12.8]	0.87 [22]	0.58 [14.6]	CON-MIC4 CON-MIC6				-4 [-20]		
E5	0.65 [16.6]	1.24 [31.6]	1.22 [31.1]	1.22 [31.1]	CON-FC5 (5 PIN)				-40 [-40] (CPR<2000) -25 [-13] (CPR≥2000)		
E6		1.73 [43.94]	2.24 [56.9]	1.39 [35.2]					-40 [-40] (CPR<3600) -25 [-13] (CPR≥3600)		
E5D ³		1.43 [36.22]	1.22 [31.1]	1.22 [31.1]	CON-FC10 (10 PIN)				-40 [-40] (CPR<2000) -25 [-13] (CPR≥2000)		
E6D ³		1.90 [48.26]	2.24 [56.9]	1.26 [32.1]							

1. All single-ended encoders are 4- or 5-pin connections. All differential encoders are 10-pin connections.
2. Encoder connectors and cables not provided.


3. Encoder models ending in "D" are differential configurations.
4. For more detailed electrical specifications, visit www.usdigital.com.

Pinouts


Pin	E2, E3	E4T		E5, E6	
		Single-Ended	Differential	Single-Ended	Differential
1	Ground	+5 VDC Power	Ground	Ground	Ground
2	Index	A Channel	A+ Channel	Index	Ground
3	A Channel	Ground	A- Channel	A Channel	Index-
4	+5 VDC Power	B Channel	+5 VDC Power	+5 VDC Power	Index+
5	B Channel	-	B+ Channel	B Channel	A- Channel
6	-	-	B- Channel	-	A+ Channel
7	-	-	-	-	+5 VDC Power
8	-	-	-	-	+5 VDC Power
9	-	-	-	-	B- Channel
10	-	-	-	-	B+ Channel

OUTPUT WAVEFORMS


SINGLE-ENDED

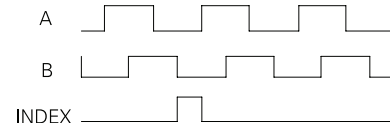


DIFFERENTIAL

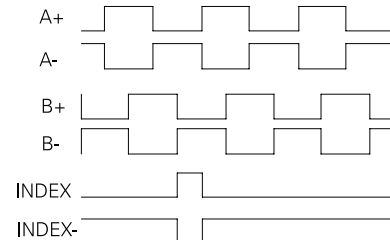

SINGLE-ENDED

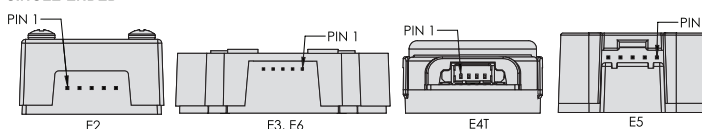

DIFFERENTIAL

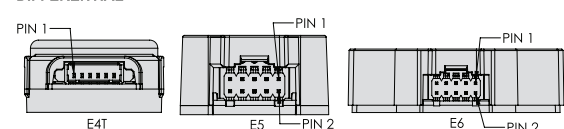




Make it Yours By Customizing a Stepper Motor Linear Actuator

Thomson routinely collaborates with original equipment manufacturers globally to solve problems, boost efficiency and enhance the value passed on to their customers. Our technology and application experience can be harnessed to help you go beyond standard products to fit the exact needs on your next product.

Below you'll see an example of some common customizations for stepper motor linear actuator products. See next page for details on each option.

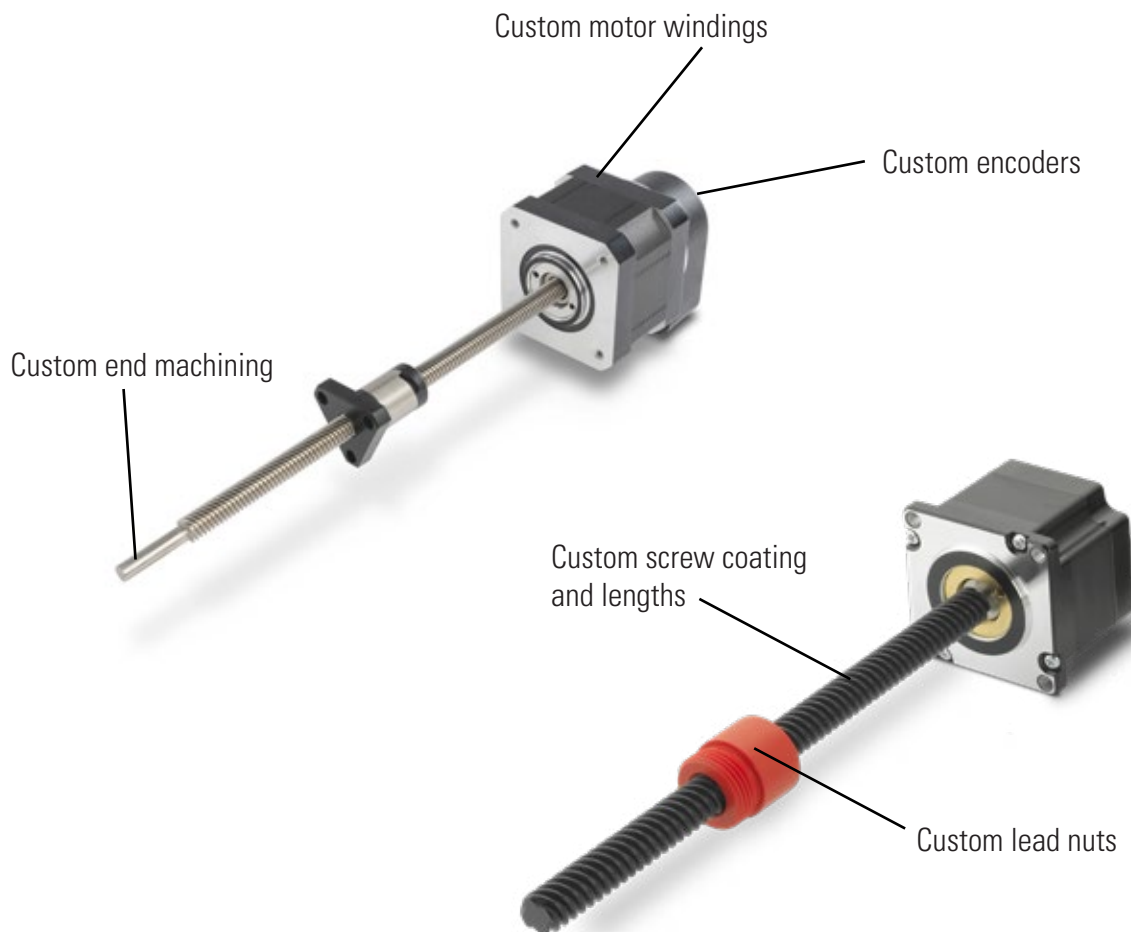

Let's Get Started

Call today and let's talk about how our vast offering of standard, modified standard and custom solutions can deliver the optimal balance of performance, life and installed cost for you. Global contact information is available at www.thomsonlinear.com/cs.

Custom lead screw end machining

Thomson standard end machining offerings serve a wide variety of needs and applications. We can also accommodate special requests, including:

- Male or female threaded ends to your specified thread and pitch
- Custom-machined journals and ring groove
- Hex or square ends
- Keyways and cross holes
- Most custom end-machining options can be accommodated. Contact Thomson with a drawing to get started.

Custom lead nuts

For MLS configurations, Thomson can create a custom lead nut to your specifications. Simply contact us with a drawing, and we will work to meet your needs.

Custom motor mounts

A custom mount can provide increased design flexibility with regards to motor mounting in your assembly. Contact us if you'd like a special flange solution, and we'll work to create a mount to your exact dimensional requirements.

Rotary encoders

Applications often require extra information in the form of encoder feedback. Thomson has experience integrating encoders into our stepper motor linear actuator assemblies, and our selection delivers real-time information about position, speed and direction. Encoders can be seamlessly pre-assembled onto the backs of motors on Thomson SMLAs.



Custom wiring, cabling and connectors

To optimize integration of our motors in your assembly, Thomson offers custom connection methods, including:

- Flying wire leads or custom connectors
- Twisting wire leads to your specification
- Heat shrink or expandable tubing
- Custom cable housings
- Contact Thomson with your custom wiring requirements



Custom lead screws


Depending on the configuration, Thomson can provide a wide variety of lead screws. For recommended maximums, see individual motor sections. For anything outside of these ranges, contact Thomson.

Screw coating


On MLS configurations requiring dry and maintenance-free lubrication, Thomson can offer PTFE coating.

Wiring and Connectors

Thomson offers standard wiring and connector pin-outs (shown below). However, if you have unique application requirements such as a specific mating connector you'd like to easily plug into, we also offer custom wiring and connectors to match your needs. Just contact us with your request, and we'll find a solution.

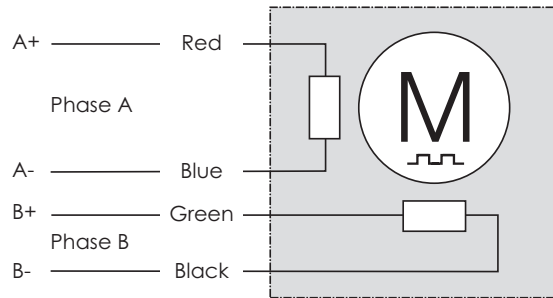


MLSX8

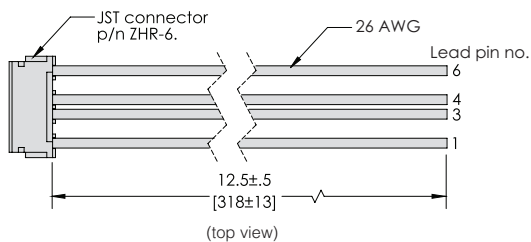

Pin	Phase	Color
1	A+	Red
2	NA	NA
3	A-	Blue
4	B+	Green
5	NA	NA
6	B-	Black

MLx11

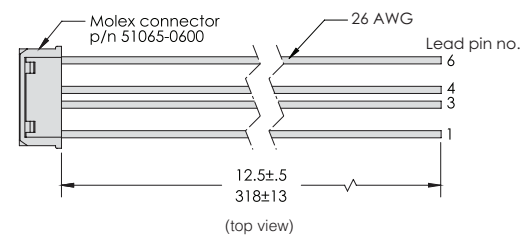

Pin	Phase	Color
1	B-	Black
2	NA	NA
3	B+	Green
4	A-	Blue
5	NA	NA
6	A+	Red

MLx14, MLx17 and MLx23

Lead Color	Phase
Red	A+
Blue	A-
Green	B+
Black	B-

- MLx14, MLx17 and MLx23 motors come standard with flying leads
- 26 AWG lead wires for MLx14
- 22 AWG lead wires for MLx17 and MLx23
- Other lead wire gauges available - contact Thomson for more details

Glossary

Accuracy	A measurement of precision. Perfect accuracy, for example, means advancing a lead nut linearly one inch from any point on a screw will always require the exact same number of revolutions.
Axial Load	A load passing through the center axis of the lead screw.
Backdrive	Application of a force on a lead nut to cause rotation of the screw; in essence, converting linear to rotary motion.
Backlash	The axial or radial free motion between the lead nut and lead screw; a measure of system stiffness and repeatability.
Bipolar Motor	Motor with two phases and a single winding per phase (4 lead wires). All Thomson standard stepper motors are bipolar.
Chopper Drive	A constant current stepper motor drive that operates by quickly cycling power on and off, or “chopping.”
Column Load	Column loading is the compression load on the screw. This load has a tendency to buckle the screw and is dependent on screw diameter, screw length and type of mounting.
Concentricity	Condition where the median points of two or more radially-disposed features are congruent with the axis (or center point).
Critical Speed	The condition where the rotary speed of the assembly sets up harmonic vibrations. These vibrations are the result of shaft diameter, unsupported length, type of bearing support, lead nut mounting method and/or screw rpm. Vibrations may also be caused by a bent screw or faulty installation alignment.
Drag Torque	The amount of torque required to drive the unloaded lead screw.
Driving Torque	The amount of effort required to turn the lead screw and move the load.
Dynamic Load	Load applied to stepper motor linear actuator assembly while in motion.
Efficiency (Lead Screw)	Expressed as a percentage, the ability of a lead screw assembly to convert torque to thrust with minimal mechanical loss. Thomson lead screws range in efficiency from 35 to 85%.
Efficiency (Motor)	Expressed as a percentage, the motor’s ability to turn electrical energy into mechanical energy with minimal thermal loss. Thomson stepper motors range in efficiency from 65 to 90%.
End Fixity or End Bearing Support	How the ends of the lead screw are fixed or supported.
Holding Torque	Torque required to rotate motor shaft while all coils are fully energized with a steady state DC current.
Inertia	The level of rotational resistance of a lead screw or shaft.
Lead	The axial distance a screw travels during one revolution. If thread is 1 start, lead = pitch.
Microstepping	Dividing the motors natural full step by smaller increments. Example: 1.8 ° step motor microstepped at 64× will mean that 1 pulse is now $1.8^{\circ}/64 = 0.028^{\circ}$.
Perpendicularity	Condition of a surface, center plane, or axis at a right angle to a plane or axis.
Pitch	Distance measured between adjacent threads of the lead screw - if thread is 1 start, then pitch = lead.
Pulse Rate	The number of pulses per second (pps) applied to the windings of the motor. 1 pulse = 1 step.
Repeatability	A measure of constancy that is directly related to axial backlash. Higher backlash equates to lower repeatability and may be corrected by preloading the lead nut if required.
Resolution	The linear distance the stepper motor linear actuator will actuate the lead nut or screw per input pulse.
Resonance	Vibration occurring when a mechanical system operates within an unstable range.
Runout	Composite tolerance used to control the functional relationship of one or more features of a part to an axis.
Side Load (Radial)	A load applied perpendicular to the lead screw axis. Not recommended for lead screw applications as it will reduce functional life.
Static Load	Static load is the maximum non-operating load capacity above which failure of the motor and/or lead nut occurs.
Straightness	Condition where an element of a surface, or an axis, is in a straight line.
Stroke	The maximum length of extension of a lead nut on the lead screw.
Thrust Force or Thrust Load	Thrust load is loading parallel to and concentric with the centerline of the screw which acts continuously in one direction. Thrust loading is the proper method of attaching the load to the lead screw assembly.
Travel/Step or Travel Rate	The linear translation of a lead nut or screw for one full step of the motor.

Contact us or any of our 2000+ global distribution partners by scanning the code below
or visiting www.thomsonlinear.com/contact



RegalRexnord™
www.regalrexnord.com

www.thomsonlinear.com

Stepper_Motor_Linear_Actuators_BRUK-0012-13 | 20251020KB
Specifications are subject to change without notice. It is the responsibility of the product user to
determine the suitability of this product for a specific application. All trademarks property of their
respective owners. ©2025 Thomson Industries, Inc. | 2400 Curtiss Street, Downers Grove, IL 60515 USA

THOMSON®